

AUTOMOTIVE

Promotion valid from 01/09/2025 to 28/02/2026 Prices do not include V.A.T. - Subject to availability

2025 2/2



Configure your **WORKSHOP** in 3D online










The images are for reference only. Beta Utensili S.p.A. reserves the right to update and upgrade its product range without notice.

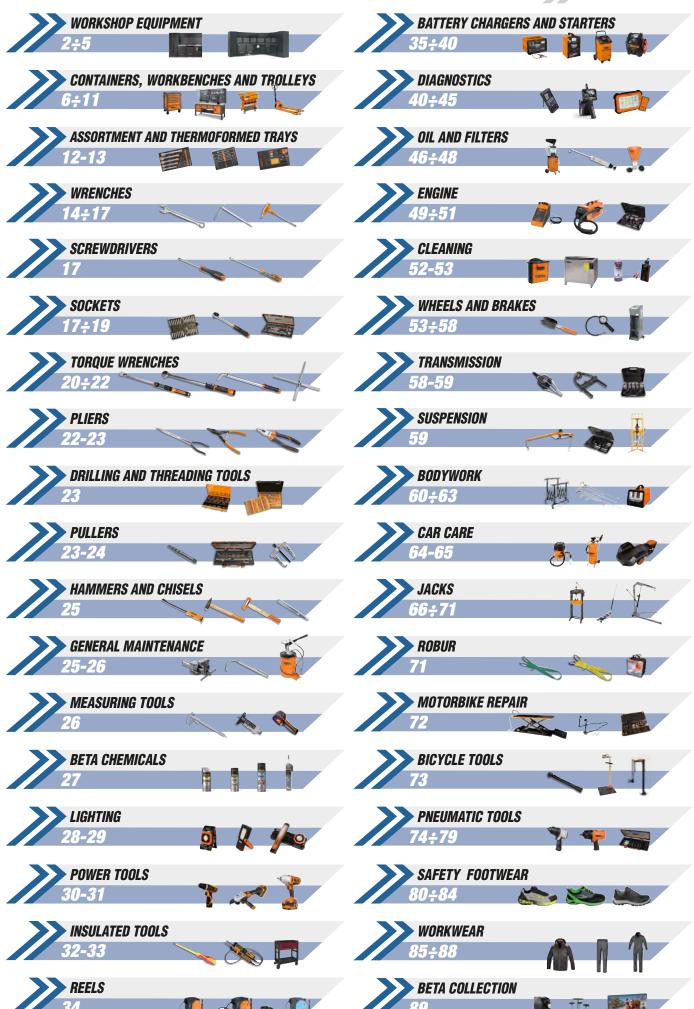



THE WORKSHOP YOU'VE ALWAYS DREAMED OF

PURCHASE COMBINATION C45PRO 2.0 X or W with a **NEW 61,5-CM-DEEP WORKTOP**

COMBINATION C45PRO 2.0

Workshop equipment combination C45PRO 2.0

- Fixed module with 7 drawers (C45PRO 2.0 M7)
- Mobile roller cab with 7 drawers (C45PRO 2.0 C7)
- Fixed service module (C45PRO 2.0 MS)
- 3 perforated tool panels (C45PRO 2.0 PF)
- 3 wall-mounted cabinets (C45PRO 2.0 PM)
- 3 wall brackets, wide type (C45PRO 2.0 SL)
- 1 wall bracket, narrow type (C45PRO 2.0 SS)
- Two-door cabinet (C45PRO 2.0 AS2)



while stocks last





£ 7,530.00 **£ 2,549.**00



IS JUST A STEP AWAY!!!

NEW



... Beta WILL TAKE CARE **OF THE TOOLS!**







C45PRO 2.0 W/268UT

• Multi-ply wood worktop, dimensions 2,040x615 mm (C45PRO 2.0 PWE/3-2.0MT)





C45PRO 2.0 X/268UT

• Stainless steel coated MDF worktop, dimensions 2,040x615 mm (C45PRO 2.0 PXE/3-2.0MT)





MM-1 BW



MM-2 BW





MM-3 BW



MM-4/N BW




MM-5 BW



RSC50 2.0



NEW







£ 9,341.00

The workshop equipment combination, RSC50, has been upgraded into the new, **revolutionary RSC50 2.0, with a new 70-cm-deep worktop**,

for a large, convenient, functional work surface. It can be fitted with a vice, thereby allowing heavy-duty jobs to be carried out.



Workshop equipment combination RSC50 2.0

- 1 worktop, 2,240x700 mm (RSC50 2.0 NPG/3-2.2MT)
- 1 fixed service module (RSC50 2.0 MS-2AVV) with compressed air hose reel item 1900S 8x10 and cable reel item 1844 15-H05/SCK (included)
- 1 mobile roller cab with 7 drawers (RSC50 2.0 C7)
- 1 fixed module with 4 drawers (RSC50 2.0 M4)
- 3 wall-mounted cabinets (RSC50 2.0 PM)
- 3 upper perforated tool panels (RSC50 2.0 PFS)
- 3 lower perforated tool panels (RSC50 2.0 PFI)
- 3 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 two-door cabinet (RSC50 2.0 A2)



RSC50 2.0 I





Workshop equipment combination RSC50 2.0

- 1 worktop, 2,240x700 mm (RSC50 2.0 NPG/3-2.2MT)
- 1 worktop, 1,495x700 mm (RSC50 2.0 NPG/2-1,5MT)
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 mobile roller cab with 7 drawers (RSC50 2.0 C7)
- 1 fixed service module with 2 drawers (RSC50 2.0 MS-2C)
- 1 self-supporting complete corner (RSC50 2.0 NAC-G)
- 1 fixed module with 5 drawers (RSC50 2.0 M5)

- 1 fixed two-door module (RSC50 2.0 MA)
- 5 wall-mounted cabinets (RSC50 2.0 PM)
- 5 upper perforated tool panels (RSC50 2.0 PFS)
- 5 lower perforated tool panels (RSC50 2.0 PFI)
- 5 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 2 single-door cabinets (RSC50 2.0 A1)



NEW

RSC50 2.0 F



Workshop equipment combination RSC50 2.0

- 1 worktop, 2,240x**700** mm
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 mobile roller cab with 7 drawers (RSC50 2.0 C7)
- 1 fixed service module with 2 drawers (RSC50 2.0 MS-2C)
- 3 wall-mounted cabinets (RSC50 2.0 PM)
- 3 upper perforated tool panels (RSC50 2.0 PFS)
- 3 lower perforated tool panels (RSC50 2.0 PFI)
- 3 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 two-door cabinet (RSC50 2.0 A2)









• 1 worktop (2,240x**700** mm) made from painted sheet metal (RSC50 2.0 NPG/3-2,2MT)

i 411 kg



• 1 worktop (2,240x**700** mm) made from stainless steel coated MDF (RSC50 2.0 PX/3-2.2MT)

i 405 kg ✓



• 1 worktop (2,240x**700** mm) made from multi-ply wood (RSC50 2.0 PW/3-2,2MT)

iii 386 kg ∠

RSC50 2.0 D

Workshop equipment combination RSC50 2.0

- 1 worktop, 1,495x**700** mm
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 fixed two-door module (RSC50 2.0 MA)
- 2 wall-mounted cabinets (RSC50 2.0 PM)
- 2 upper perforated tool panels (RSC50 2.0 PFS)
- 2 lower perforated tool panels (RSC50 2.0 PFI)
- 2 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 single-door cabinet (RSC50 2.0 A1)







RSC50 2.0 DX **050001023**

• 1 worktop (1,495x**700** mm)

(RSC50 2.0 PX/2-1,5MT)

Beta

£6,360.00 3,076.00

made from stainless steel coated MDF

• 1 worktop (1,495x**700** mm) made from multi-ply wood (RSC50 2.0 PW/2-1,5MT)

RSC50 2.0 DW

050001024

i 263 kg ✓



• 1 worktop (1,495x**700** mm) made from painted sheet metal (RSC50 2.0 NPG/2-1,5MT)

i 276 kg



£ 6,260.00

3,076.00

CONTAINERS, WORKBENCHES AND TROLLEYS



RSC24

Mobile Roller cab

- ABS reinforced worktop
- Multi-purpose top with anti-fall edges and eight holes for accommodating screwdrivers
- Drawer bases protected by foamed rubber mats
- 4 castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- Front centralized safety lock
- Built-in bottle holder (can be applied on both sides)



		Ral 2011	Rai 2011	Rai 9006	Rai 3000	Rai 5015	Ral 7016	Ral 9005	ı	C	
		IXai 2011	Ral 7016	Ral 7016	Ral 7016	Ral 7016	itai 1010	Ital 3003	kg	L	
	RSC24/5	024004050	024004051	024004052	024004053	024004056	024004057	024004059	60	£887.00 £ 485.	00
	RSC24/6	024004060	024004061	024004062	024004063	024004066	024004067	024004069	62	£955.00 £ 541.	00
	RSC24/7	024004070	024004071	024004072	024004073	024004076	024004077	024004079	63	£1,028.00 £ 579.	00
	RSC24/8	024004080	024004081	024004082	024004083	024004086	024004087	024004089	66	£1,109.00 £ 626.	00

2400 RSC24/7-VAS

3 024004048

Assortment of 223 tools for AUTOMOTIVE 1/4 1/2



M301



£1,215.00

Medium version



M304



M306

SAVE UP TO £ 1,665.00

THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

Promotion valid only with RSC24 FULL ORANGE

Mobile roller cab RSC24/7-F0

- 7 removable drawers (588x367 mm), with ball bearing slides:
- 5 drawers, 70 mm high
- 1 drawer, 140 mm high
- 1 drawer, 210 mm high





THE MOST COMPLETE Beta ASSORTMENT EVER AND THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

THE MOST COMPLETE BETA ASSORTMENT EVER

2400 RSC24/8-VAL

3 024004007

Assortment of 445 tools for AUTOMOTIVE 1/4 38 1/2



















£5,540.00

£ 1,869.00 Extra large version

SAVE UP TO £ 3,671.00





THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

Mobile roller cab RSC24/8-F0

8 removable drawers (588x367 mm), with ball bearing slides

- 6 drawers, 70 mm high
- 2 drawers, 140 mm high

Promotion valid only with RSC24 FULL ORANGE



RSC24AXL

Mobile roller cab, WITH ANTI-TILT SYSTEM, long model

- · ABS reinforced worktop with anti-fall edges, eight holes for accommodating screwdrivers and 6 tote trays

 Sturdy nylon front, with built-in label holder.

- Drawer bases protected by foamed rubber mats
 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
 Front centralized safety lock

- Built-in side bottle holder (can be applied on both sides)
 Each drawer can accommodate up to 6 EVA foam or ABS thermoformed trays





				Ral 7016	n°
		Ral 7016	Ral 7016	Rai /UIO	"
					5
	RSC24AXL/7	024004271	024004273	024004277	1
					1
	RSC24AXL/8	02/00/281	024004283	024004287	6
	N3UZ4AXL/O	024004201	024004203	024004207	2
	RSC24AXL/9	02/00/201	024004203	024004207	8
	HJUZ4AXL/J	024004231	024004233	024004231	1

n°		♣ max	i i kg		£		
5	70 mm	30 kg			0.000.00		
1	140 mm	35 kg	84	£ 1,445.00	£ 822.00		
1	210 mm	35 kg					
6	70 mm	30 kg	88	£ 1,545.00	£ 878.00		
2	140 mm	35 kg	00	<u>L</u> 1,340.00	£ 0/0.UU		
8	70 mm	30 kg	90	£ 1,645.00	£ 934.00		
1	140 mm	35 kg	90	<u>L</u> 1, 04 5.00	2 334.00		



£ 1,570.00

RSC28

O kg SuperTank trolley with wood worktop and 10 drawers


- 10 drawers (588x367 mm) with ball bearing slides
- · Quick, safe system for opening and closing drawers, with nylon and fibreglass front
- 5 side drawers:
 - 4 drawers, 70 mm high 1 drawer, 210 mm high
- 5 front drawers:
 - 4 drawers, 70 mm high 1 drawer, 210 mm high
- Drawer bases protected by foamed rubber mats.
- 4 high-capacity castors, Ø 150 mm: 2 fixed and 2 steering with brakes
 • 2 centralized safety locks

028003007

- 3 front tool drawers
- Multi-ply wood worktop with holes for a vice (1599F/150 - 1599GI/150, to be ordered separately)
- Built-in tool compartment



028003003



n°		i Max
8	70 mm	25 kg
2	210 mm	30 kg



- · Side compartment with foldaway door with lock
- Built-in bottle holders
- 135-mm-high storage compartment with plastic-covered base

028003001



RSC24AXXL


£ 1,172.00

Mobile roller cab with 8 drawers and anti-tilt system, long model

- 1 fully removable drawer (1,176x367 mm), with ball bearing slides
- 7 fully removable drawers (882x367 mm), with ball bearing slides:
 6 drawers 70 mm high
 1 drawer 140 mm high
- Worktop made from stainless steel coated MDF, with holes for vice item 1599F/125 or 1599GI/125 (to be ordered separately) and 6 tote trays
- · Sturdy nylon fronts, with built-in label holders
- Drawer bases protected by foamed rubber mats
- Removable side compartment, with ball bearing slides, with shelf and lock
- 4 castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- 3 safety locks
- · Built-in paper roll holder
- Built-in bottle holder
- Following trays can be added: up to 8 EVA foam or ABS thermoformed trays in drawer 1,176x367 mm, up to 6 EVA foam or ABS thermoformed trays in drawer 882x367 mm







n°		i Max
1	70 mm (1.176x367 mm)	40 kg
6	70 mm (882x367 mm)	30 kg
1	140 mm (882x367 mm)	35 kg

C45PRO 2.0 MWS

Work Station roller cab with 7 drawers and built-in waste bin

- 1 drawer (1248x406 mm) with ball bearing slides
- 6 drawers (782x406 mm) with ball bearing slides:
 5 drawers 65 mm high
 1 drawer 145 mm high
- Drawer bases protected by foamed rubber mats
- Can be fitted with thermoformed travs
- Storage compartment with intermediate shelf and door, interior dimensions 504x424x597 mm
- · Built-in waste bin
- Built-in paper roll compartment
- 4 heavy-duty castors, Ø 150 mm,
 2 fixed and 2 steering with brakes
- Front centralized lock
- Can accommodate a vice (1599P/150, to be ordered separately)





 Worktop (1680 mm) made of stainless steel coated MDF





• Multi-ply wood worktop (1680 mm)



£1,620.00


£ 892.00







840/1220 mm

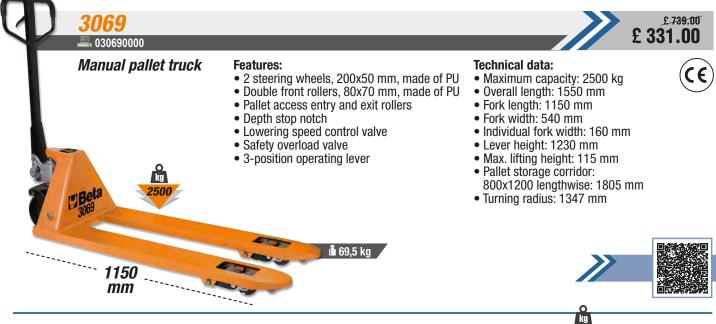

Simple workbench 2.1 m long

- Steel frame with 4 supporting legs
- Holes for a vice (1599F/150 1599GI/150, to be ordered separately)
- Lower half-shelf for objects, 1,788x335 mm; thickness: 40 mm
- · Can be fixed to floor

C58BC-2,1



 Worktop (2,100x750 mm) made from multi-ply wood, 38 mm thick





Worktop (2,100x750 mm) made from stainless steel coated MDF, 38 mm thick ₫ 93 kg



MODULAR line

C58BCA-W2,1



NEW RANGE OF WORKBENCHES

Comprehensive work bench, 2.1 m long, with wood worktop, 8 drawers and door module

Main features:

- Worktop (2,100x750 mm) made from multi-ply wood, 38 mm thick
- 8 drawers (367x588 mm) with ball bearing slides:
 5 drawers 70 mm high

 - 2 drawers 140 mm high 1 drawer 210 mm high
- Drawer bases protected by foamed rubber mats
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed tray
- 1 module with door and lock
- Holes for a vice (1599F/150 1599GI/150, to be ordered separately)
- · 2 lower half-shelves for objects, 1,788x335 mm, 40 mm thick
- Can be fixed to floor

Kit of 4 perforated tool panels with:

- 3 supporting brackets
- 6 400-mm uprights
- 2 1,015-mm supports; can accommodate 1 19" rack multi-socket (not included)
- 4 perforated tool panels, 1,015x25x400 mm
- 1 shelf for objects 1,024x250 mm

Lighting kit contents:

2 LED lamp tracks

• 2 IP20 LED lamps, with fixing clips









2100 mm

Workbench, 2.1 m long, and 4 drawers

- 4 drawers (367x588 mm) with ball bearing slides: 2 drawers 70 mm high
- 2 drawers 140 mm high.
- Drawer bases protected by foamed rubber mats
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- 2 lower half-shelves for objects, 1,788x335 mm; thickness: 40 mm
- · Can be fixed to floor



 Worktop (2,100x750 mm) made from multi-ply wood, 38 mm thick



C58BC-X2,1 4C £1,174.00 £ 640.90




ONLINE CONFIGURATOR



ASSORTMENT AND THERMOFORMED TRAYS



Recommended with: RSC23T - RSC24 - RSC24A - RSC24AXL - RSC24AXL/P7 - RSC24AXXL - RSC24L/7- RSC24L-CAB - C37 - C39 -C39SM - C39MD - RSC28 - C59 - C58BC - RSC55 - RSC50 2.0

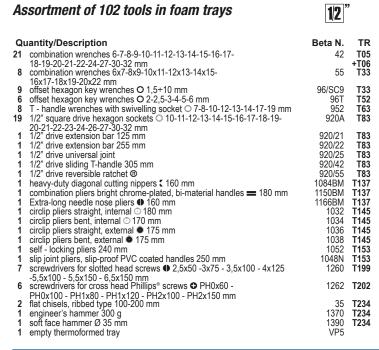




£306.00


£ 173.00

142 8-9-10-11-12-13-14-15-16-17-18-19 mm


£ 208.00


117.00

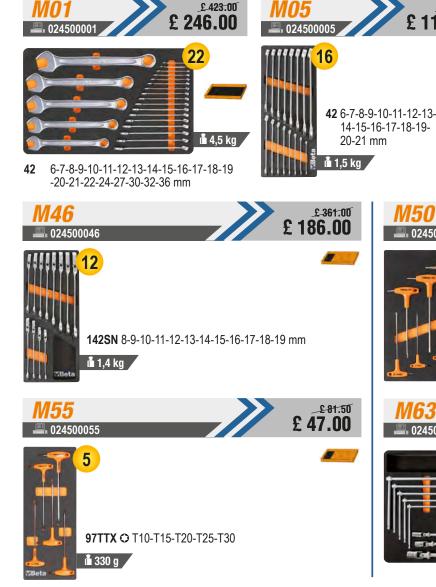

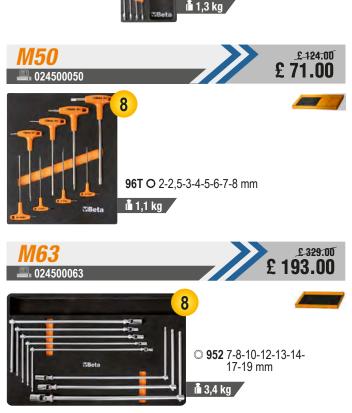

£ 467.00





1/4" 1/2" 98 00000 1802 🧐 🙆 000000000 🕯 6,7 kg

895/1 - 895/3 - 895/6 O 900 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm O 900L 5-6-7-8-9-10-11-12-13 mm O 900MF 3-4-5-6-7 mm 0,8x4-1x5,5-1,2x6,5-1,2x8 mm **●** 900LP

PH1-PH2-PH3-PH4 **○** 900PH O 900TX T10-T15-T20-T25-T27-T30-T40

900/20 50 mm - 900/20L 100 mm

900/21 150 mm 900/25 900BG/30 900/42

900/55

O 920A 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-

28-30-32 mm 920/15 - 920/25

920AN/125 125 mm 920AN/250 250 mm 920/42

@ 920/55

© 920FTX 10-12-14-16-18-20-22-24 mm **920AL** 10-12-13-14-15-16-17-18-19-21-22 mm

M105

£ 607.00



O 900 4-4,5-5-5,5-6-7-8-9-10 11-12-13-14 mm 900L 5-6-7-8-9-10-11-12-13 mm 96BPC/SC9 1,5-2-2,5-3-4-5-6-8-10 mm 895/1 - 895/3 - 895/6 O 900ME 3-4-5-6-7 mm **⊕** 900LP 0,8x4-1x5,5-1,2x6,5-,2x8 mm **○** 900PH PH1-PH2-PH3-PH4 O 900TX T10-T15-T20-T25-T27-T30-T40

900/16 □ 1/4 - ■ 3/8 900/... 50-100-150 mm 900/25 - 900BG/30 - 900/42

@ 900/55 6-7-8-9-10-11-12-13-14-15-16-O 910A 17-18-19-20-21-22 mm

□ 3/8 - ■ 1/4 □ 3/8 - ■ 1/2 910/15 910/16 910/21 125 mm 910/22

250 mm 910/25 - 910/42 @ 910/55

8-10-11-12-13-14-15-16-17 O 920A 18-19-20-21-22-23-24-26 27-28-30-32 mm

920/15 □ 1/2 - ■ 3/8 920/25 920AN 125 - 250 mm

920/42 @ 920/55

16-17,8-20,8 mm O 956F



1927P 1750 Nm

13-17-19-21-22-24 mm 720L 720ME

O 5-6-8-10-12-14-17-19 mm O 10-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm 720

720LC 0 17-19-21 mm



£ 252.00



⊙1032 180 mm 1052 240 mm 1082BM **1034** 170 mm 1098 1036 175 mm 1038 175 mm 1112 1048N 250 mm 1128BM 145 mm

=1150BM 180 mm ● 1166BM 160 mm 160 mm 220 mm **● 1168BM** 160 mm 250 mm

£ 121.00



Betaevox i 1,8 kg

1201E 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm

4 1201EN

4x30 mm PH0x60-PH1x80-PH2x100-PH3x150 mm 1202F

1202EN PH1X30 mm **1207E/TX** T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45

3.5x100 mm 1253

024500230

£ 230.00



30 Ø 2-3-4 mm 1370 500 g 31 Ø 2-3-4-5-6-8 mm 1390 Ø 35 mm **1692** 3 m 32 Ø 4 mm **34** 150 mm 1712 **35** 200-250 mm 36 125 mm

■ 1719BMA/Q 200 mm ▲ 1719BMA/T 200 mm ■ 1719BMA/P 200 mm ▶ 1719BMA/M 200 mm ● 1719BMA/R 200 mm 1737NX

1771 170 mm



BETA'S ICONIC WRENCH

A stylish, slim shape enhanced by a slender profile, lighter to the touch.

The strength, resilience and ergonomic design of the Beta wrench reach even higher

values, to provide users with the best possible tool.

The manufacturing process is carried out in our factories in Sovico and Sulmona, on the basis of state-of-the-art automation technology and the best trained workers.

ERGONOMIC

The offset ring has a 15 degree angle to protect the hand. The shape is obtained from a die; it is not bent later.



POWERFUL

Torque values more than doubled compared to the requirements to be satisfied under ISO 1711.

STRENGTH

Remarkable strength: in case of improper use, the wrench buckles. without breaking suddenly and dangerously.





£ 102.00

Set of 15 combination wrenches with holder

6-7-8-9-10-11-12-13-14-15-16-17-19-22-24 mm





£ 242.00

£ 143.00

Set of 26 combination wrenches

6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-30-32 mm





£ 105.50 £ 61.00

Set of 8 combination wrenches with thin open ends in roll-up wallet made of durable polyester

3 10-11-12-13-14-15-17-19 mm



£ 83.00

Set of 12 double open end wrenches in roll-up wallet made of durable polyester

€ 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x26-25x28-30x32 mm



£ 127.50 £ 73.00

Set of 5 half-moon ring wrenches

10x12-11x13-15x17-16x18-19x22 mm





£ 71.00

Set of 8 double ended deep offset ring wrenches in roll-up wallet made of durable polyester

3 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm







Set of 9 ratcheting combination wrenches, straight series in wallet

8-10-11-12-13-14-15-17-19 mm







Set of 6 flare nut open ring wrenches

❸ 8x10-10x11-11x13-12x14-17x19-19x22 mm





Self-locking wrench with automatic take-up device for hexagons, 8 to 32 mm


Ideal for hexagon, Spline, square and Torx® head screws, including damaged screws



EFFECTIVE ON WORN SCREWS QUICK, MULTIPURPOSE











hexagon













Set of 9 ball head offset hexagon key wrenches, with screw holding system





Set of 9 ball head offset hexagon key wrenches





Set of 8 ball head offset key wrenches, long model, for Torx® head screws





Set of 8 ball head offset key wrenches, long model, for Tamper Resistant Torx® head screws





Set of 5 offset hexagon key wrenches with handles

O 2,5-3-4-5-6 mm





Set of 6 ball head offset key wrenches for Torx® head screws with handles

O T10-T15-T20-T25-T30-T40



0




0

WRENCHES - SCREWDRIVERS - SOCKETS









Set of 8 screwdrivers

£41.50 £ 24.00

1201E **Ф** 2,5x50-3x75-4x100-5,5x100-6,5x150 mm



3 012031019

Set of 10 screwdrivers 1201E **●** 2,5x50-3x75-4x100-5,5x150-6,5x150 mm

1202E **○** PH0x60-PH1x80-PH2x100 mm 1201EN **⊕** 4x30 mm 1202EN **◆** PH1x30 mm



£ 53.00

£ 31.00

Set of 7 screwdrivers

1207E/TX O T6-T8-T10-T15-T20-T25-T30



00

£ 54.00

£ 31.00



THE EVOLUTION OF THE SCREWDRIVER!



1293/D8

3 012930403

£82.50 £ 37.00

Set of 8 screwdrivers

1290 **1**0,5x3x75-0,8x4x100-1x5,5x150-1,2x6,5x150-1,2x8x150 mm

1292 ◆ PH0x3x60 -PH1x4,5x80-PH2x6x100 mm







£134.00 £ 74.00

Assortment of 52 hexagon bits, 10 mm and 2 accessories

	867PE	0	4-5-6-7-8-10-12 mm
	867PE/L	0	4-5-6-7-8-10-12 mm
==	867XZN	0	M5-M6-M8-M10-M12
	867XZN/L	0	M5-M6-M8-M10-M12
	867TX	0	T20-T25-T30-T40-T45-T50-T55
	867TX/L	0	T20-T25-T30-T40-T45-T50-T55
	867RTX	0	T20-T25-T30-T40-T45-T50-T55
	867RTX/L	0	T20-T25-T30-T40-T45-T50-T55
	867/1		○ 10 mm - □ 3/8"
	867/2		○ 10 mm - □ 1/2"





£ 168.00 £ 93.00

Set of 9 socket drivers for Torx® head screws on support

○ T20-T25-T27-T30-T40-T45-T50-T55-T60



14"14



900/C11

🖳 009000971

£ 124.00

Assortment of 11 hexagon sockets, 20 bits and 8 accessories,

in metal case



	861LP	•	0,5x3-0,8x5,5-1x5,5-1,2x6,5 mm
	861PE	0	3-4-5-6-8 mm
	861PH	0	PH0-PH1-PH2-PH3
	861TX	0	T8-T10-T15-T20-T25-T30-T40
-	895/1		○1/4" - □1/4 "
	900	0	5-5,5-6-7-8-9-10-11-12-13-14 mm
-	900/16		□1/4 - ■3/8"
	900/20		50 mm
-	900/21		150 mm
	900/25		
	900/42		
-	900BG/30		
•	900/55	•	

902A/C22

-- 009020807

Assortment of 22 hexagon sockets and 6 accessories, in metal case

		900	0	5-5,5-6-7-8-9-10-11-12-13 mm
4/4 "		900/20		50 mm
		900/25		
	•	900/55	(1)	
77		920A	0	10-13-14-15-17-18-19-22-24 27-30-32 mm
1/9 "		920/21		125 mm
		920/25		
	•	920/55	0	



920A/C17M

£ 177.00

Assortment of 17 hexagon sockets and 5 accessories in foam tray, in metal case

1/2 "

928A/C12

£ 818.00 £ 467.00

£347.00 £ 197.00

Assortment of 12 hexagon hand sockets and 5 accessories, in metal case

3/4



	920A	0	10-11-12-13-14-15-16-17-18-19-20-21-22- 24-27-30-32 mm
	920/21		125 mm
	920/22		255 mm
650	920/25		
	920/42		305 mm
	920/55	0	



530x220x80 mm

	928A	0	22-24-27-30-32-34-36-38-41-46-50-55 mm
	928/21		200 mm
=======================================	928/22		380 mm
10	928/25		
	928/42		450 mm
•	928/55		•



BETA'S RANGE OF RATCHETS



Ratchet with up to **72 teeth: take-up angle of 5°** for jobs in small spaces. 17-tooth serration, including 11 always in grip.

NEW

BETA'S RANGE OF RATCHETS HAS BEEN CHANGED AND EXPANDED: CHOOSE THE MODEL THAT SUITS YOUR NEEDS BEST!



Minimum head size for easier access.

Phosphated square drive.



One-handed reversal.



Hand pressure on the ratchet head does not cause any accidental reversal or release of the socket.

The versions with 1/2" and 3/4" square drives rely on approximately 6% weight reduction, for optimal handling and increased ease of use, without affecting sturdiness or performance.



INNOVATIVE MATERIALS FOR TOP PERFORMANCE

New straight lever: the pressing process originates from a semi-finished product with a round cross-section, specially designed to minimise inner tension, thus resulting in optimal performance.







STRAIGHT LEVER

Slim, ergonomic bi-material handle

L mm \emptyset mm A mm Teeth £45.00 £ 26.00 900/55 127 25 29 1/4" (48) 009001155 £48.50 £ 27.00 (12) 910/55 207 31 33 3/8" 009101155 920/55 271 (12) 009201155 £59.00 £ 33.00 40 41 1/2" £155.00 £ 89.00 928/55 (72) 504 58 59 3/4" 009281155

Bent lever with raised handle compared to worktop, for increased comfort and ease of use in small spaces.



EASY ACCESS TO SMALL SPACES






BENT LEVER

Slim, ergonomic bi-material handle with hanging hole.

Hanging hole on handle







TORQUE WRENCHES

410

0.1

599DGT-AW



Electronic torque wrench, torque and angle readout, with reversible ratchet and wireless data transmission, right-hand (accuracy: ± 2%) and left-hand (accuracy: ± 3%) tightening

- Tightening types: torque, angle, torque + angle
- Dual measurement mode: peak hold and track
- Light indicators, an intermittent sound and tactile feedback inform user that preset torque or angle has been reached
- Last 999 peak torque and/or angle readings can be stored and displayed
- 9 "Preset" modes can be saved and preset
- Key safety lockout
- Wrench can be associated with a certain user via software
- Tightening data traceability. Software allows date and time, tool serial number, set tightening value and reached value to be stored and associated with user ID
- Nonslip bi-material handle
- Wrench + software in 9 languages
- Included: 3 AA 1.5V batteries, wireless USB key and software USB key



4.5÷22

6÷30

 $0.6 \div 3$










Customized data processing software with immediate,

easy-to-read OK/NG result and real time display of charts

TORQUE + ANGLE



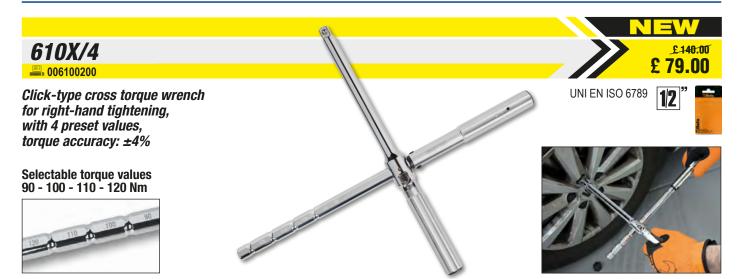





ZERO-RESET click-type torque wrenches with reversible ratchets, for right-hand tightening, torque accuracy: ± 3%

-

TORQUE WRENCH ZER®-RESET THAT DOES NOT REQUIRE RELEASING TENSION

UNI EN ISO 6789







4	Nm		لسيا	L (mm)	å g		£
666/2	5÷25	1/4"	0,05	273	395	006660702	£258.00 £ 148.00
666/2X	5÷25	3/8"	0,05	273	405	006660703	£258:00 £ 148.00
666/5	10÷50	3/8"	0,25	342	680	006660705	£233.50 £ 133.00
<i>666/10</i>	20÷100	3/8"	0,25	385	760	006660710	£235.50 £ 134.00
666/10X	20÷100	1/2"	0,25	385	770	006660711	£248.50 £ 138.00
<i>666/20</i>	40÷200	1/2"	0,5	471	1020	006660720	£256.00 £ 145.00
666/30	60÷300	1/2"	1	600	1271	006660730	£291.00 £ 167.00







£ 448.00 £ 252.00

ZERO-RESET click-type torque wrenches, in metal case, 16 pieces, with sockets and extension bars





13÷27 mm

75-125-255 mm




ZERO-RESET click-type torque wrenches with push-through ratchets, for right-/left-hand tightening, torque accuracy: ± 3%



UNI EN ISO 6789

920/15





DOES NOT REQUIRE RELEASING TENSION

UNI EN ISO 6789



Break-back torque wrenches with push-through ratchets, for right-hand and left-hand tightening, torque accuracy: ±4% in case



The break-back mechanism informs the user that the set torque has been reached through the bending of the wrench at the joint by approximately 20°.



677/C800

	Nm	kgfm	lbf.ft		шш	L (mm)	i kg	(E)	£
677/C600	120÷600	12÷60	100÷450	3/4"	10	1059	6,0	006770607	£1,028.00 £ 594.00
677/C800	200÷800	20÷80	150÷600	3/4"	10	1319	6,7	006770612	£1,071.00 £ 616.00
677/C1000	300÷1000	30÷100	200÷750	3/4"	20	1554	7,4	006770616	£1,135.00 £ 654.00

£371.00

£ 215.00



3 006010100

£ 210.00 122.00

Digital angle indicator

· For tightening screws to values set

- by measuring torsion angle
 Complete with buzzer and LED indicators informing user that preset angle has almost or finally been reached
- For right-hand and left-hand tightening
- Angle accuracy: +/-2°
- Resolution: 0.1°
- Up to 9 angle values can be preset

Up to 50 measurements can be stored
Power supply: 2 AAA-size batteries (included)






601CA

3 006010120

Digital torque and angle indicator





 Reading scale in Nm/ft.lb/in-lb/kg.cm/degrees
 Complete with buzzer and LED indicators informing use that preset angle or torque has almost or finally been reached


• Up to 9 torque or angle values can be preset

Up to 50 measurements can be stored

Supplied in an ABS case

Power supply: 2 AAA-sized batteries (included)



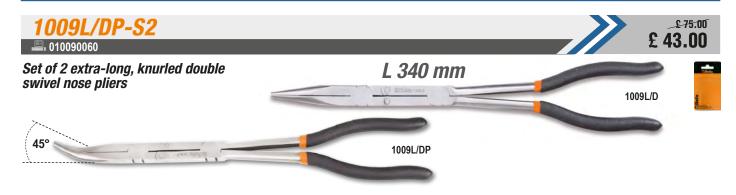

1/2"





3 010480915

Slip ioint pliers. slip-proof PVC coated handles

- · Wider head/handle angle for improved ergonomic handling
- Triangular section grip for a more comfortable contact surface
- Tapered head allowing access to small spaces
- Case-hardened nail for improved wear resistance
- Phosphated finish
- Made from chrome-vanadium steel



£32.50

£ 20.00

L mm	A Max mm	L1 mm	S mm
250	46	38	13



1169BM/D3


3 011690133

Set of 1 combination pliers, 1 long needle nose pliers and I diagonal cutting nippers



PLIERS - DRILLING AND THREADING TOOLS - PULLERS




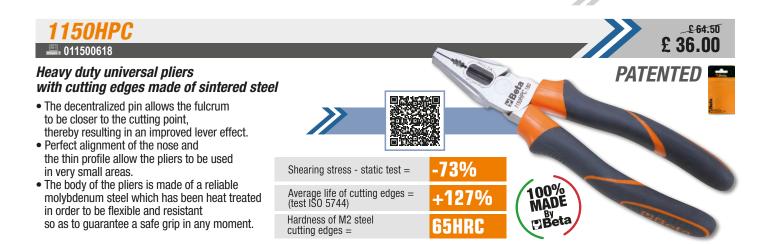









1433/C11 **3** 014330311

£ 259.00 £ 150.00

female square and hexagon drives

Set of 11 roller stud extractors with 1/2" in metal case with soft thermoformed tray



19 mm (M5) **21 mm** (M6-M7-M8-M9-M10-M10,5-M11-M12)

24 mm (M14-M16)

Beta



£ 221.00 £ 108.00

Set of 11 pullers for damaged nuts square drive with support

8-10-11-12-13-14-15-16-17-18-19 mm






4 015450011

£ 547.00 £ 310.00

Puller 1542/1 with 5 extractors 1544







24 mm

1548/C6

015480306



● 19 mm

Pullers for bearings with thin interchangeable blades

Bearings: 1548/1 6011-6020, 6206-6218, 62/28, 6303-6313, 63/22, 63/28, 6403-6410 1548/2 6000-6010, 6200-6205, 62/22, 6300-6302,

16002, 16003, 16011, 16100, 16101







1500

Two-leg universal pullers

- For both external and internal use
- · Legs can be moved along crosspiece with stop nuts

	A min÷max mm	L mm	L1 mm	mm	A1 min÷max mm		£
1500/1	25÷80	100	135	17	70÷130	015000301	£83.50 £ 48.00
1500/2	25÷130	100	135	17	80÷180	015000302	£87.50 £ 50.00
1500/3	50÷160	150	210	22	105÷220	015000303	£145.50 £ 84.00
1500/4	60÷200	150	210	22	120÷270	015000304	£199.50 £ 116.00
1500/5	80÷250	205	280	27	160÷330	015000305	£363.00 £ 211.00
1500/6	80÷320	205	280	27	160÷420	015000306	£426.00 £ 247.00
1500/7	110÷520	205	280	27	195÷600	015000307	£637.00 £ 370.00
1500/8	170÷640	230	310	36	260÷715	015000308	£1,019.00 £ 589.00



33NR

Number punches


- For engraving steel with resistance R up to 80 kg/mm²
- Kit of 9 punches: numbers 0 to 9



	H mm	L mm	A mm	(E1)	£
33NR 3	3	61	6,35	000330003	£21.30 £ 12.00
33NR 4	4	62	7,93	000330004	£26.00 £ 15.00
33NR 5	5	62	7,93	000330005	£26.00 £ 15.00
33NR 6	6	68	9,52	000330006	£31.50 £ 18.00
33NR 8	8	71	12,7	000330008	£46.00 £ 26.00

Letter punches

- · For engraving steel with resistance R up to 80 kg/mm²
- Kit of 27 punches: letters A to Z + &



	H mm	L mm	A mm	E:	£
33LT 3	3	61	6,35	000330023	£60.00 £ 35.00
33LT 4	4	62	7,93	000330024	£73.00 £ 43.00
33LT 5	5	62	7,93	000330025	£73.00 £ 43.00
33LT 6	6	68	9,52	000330026	£89.50 £ 52.00
33LT 8	8	71	12,7	000330028	£134.50 £ 77.00

HAMMERS AND CHISELS - GENERAL MAINTENANCE













Pry bars with flat curved ends





	■ g	å g	ET.	£
1370/300	300	439	013700053	£15.20 £ 9.00
1370/500	500	669	013700055	£18.60 £ 11.00
1370/800	800	949	013700058	£24.20 £ 14.00
1370/1000	1000	1180	013700060	£29.00 £ 17.00
1370/1500	1500	1722	013700065	£33.00 £ 20.00
1370/2000	2000	2181	013700070	£39.00 £ 23.00



	Ømm	🖺 g	() () () () () () () () () ()	£
1390/22	22	134	013900022	£18.60 £ 11.00
1390/28	28	230	013900028	£23.00 £ 14.00
1390/35	35	365	013900035	£31.50 £ 18.00
1390/45	45	689	013900045	£50.00 £ 29.00
1390/60	60	1462	013900060	£84.50 £ 49.00

1599F

Parallel bench vices, forged

- Fully steel cast
- Milled and hardened jaw surface
- Front opening
- High clamping depth

	L mm	BxH mm	ø mm	A max mm	(E)	£
1599F/100	100	92x46	11	125	015990100	£323.00 £ 186.00
1599F/125	125	108x54	13	150	015990125	£412.00 £ 233.00
1599F/150	150	125x62	13	200	015990150	£579:00 £ 326.00
1599F/175	175	140x70	15	220	015990175	£ 790:00 £ 448.00





Telescopic magnet with flexible head

• Length from 135 mm to 570 mm









Lever-operated grease gun, 10 kg, with high-pressure hose, 2 m

- 3 different pressure levels available:
- 4 g at 275 bar
- 7 g at 206 bar
- 9 g at 137 bar





1650

Sliding gauge made from hardened stainless steel

• Reading to 0.05 mm


£42.50

Spring locking



Digital depth gauge for tyre threads



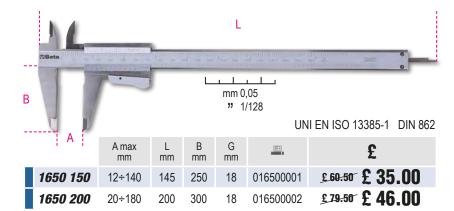



L mm	A Max mm	L1 mm
112,5	25	60

£838.00 £ 476.00

3 017600710

Infrared thermal camera


Compact thermal camera for contactless temperature measurement, suitable for applications in building, mechanical, electric installation and heating industries.



TEMPERATURE RANGE FROM -20 ÷ +600 °C



• LCD TFT display, 2", 240x320 • Sensor, 32x32 pixels Acquisition frequency 7Hz



Automatic acquisition of hot and cold spots

 Camera for acquisition of images in BMP format (max. 100 images)

- Adjustable emissivity
- Power supply: 3 alkaline AAA batteries
- USB interface
- Temperature range: -20 °C ÷ +600 °C
- Infrared band: 6.5÷14µm
- Visible/infrared image fusion: 0.5; 1; 2m
- Alarm function, selecting acceptable maximum and minimum temperatures





9710

7-in-1 multipurpose unlocking lubricant

- 1. Unlocking
- 2. Lubricating
- 3. Detergent, degreasing
- 4. Rust protective
- 5. Deoxidizing
- 6. Waterproof
- 7. Antifreezing

	ENTERED H	£
<i>9710 (1)</i>	097100040	£8.75 £ 6.00
<i>9710 (2)</i>	097101040	
<i>9710 (3)</i>	097102040	



Brake cleaner

- Ideal for cleaning brake discs and pads, engines.
- Allows any grease and tar deposits to be removed, without leaving residue.
- · Also suitable as a general degreaser for metal surfaces.
- Evaporates quickly.
- · Does not damage plastics and rubber.

	(==) ==================================	£
9740 (1)	097400050	£6.25 £ 4.00
<i>9740 (2)</i>	097401050	
<i>9740 (3)</i>	097402050	



<u>9841N</u>

3 098410120

£ 26.50 £ 14.00

BLACK SEAL

Black acetic-reticulation silicone sealant, resistant to high temperatures, with convenient pressure dispenser (pressure pack)

- Withstands temperatures up to 240 °C
- Enables permanent elastic sealing
- Replaces preformed gaskets.
- The convenient dispenser allows easy (one-coated), accurate, uniform spreading of the product



400 ml

Unlocking lubricant, super-penetrating

- Unlocking, deoxidizing, highly penetrating, for quick rust and oxidation removal from nuts, bolts, screws and gears.
- Waterproof, for water and humidity removal from treated parts.
- Highly resistant to cold and heat $(-40 \, ^{\circ}\text{C} \div +150 \, ^{\circ}\text{C})$

9712 (1) 097120040

9712 (2) 097121040

9712 (3) 097122040

9765



£6.40 £ 4.00

Cleaner for electric and electronic contacts

- · Useful for cleaning and cleansing electronic contacts, circuits and electrical components in general
- Its non-thick consistency allows uniform, quick distribution on treated surfaces, removing grease and dirt, without leaving oily residue
- Evaporates guickly
- Does not damage plastics and rubber



		£
9742 (1)	097420040	£6.90 £ 5.00

9742 (2) 097421040 9742 (3) 097422040

TEMPERATURES *UP TO 240 °C*

WITHSTANDS

9745

Cleaner for carburettors and throttle bodies

- · Specific for interior and exterior cleaning of carburettors, suction ducts and throttle bodies
- Totally removes carbonaceous residue, deposits and impurities
- Evaporates quickly.
- · Does not leave oily residue



Deicer spray · Removes ice and frost

- from windows Also ideal for frozen locks
- and mechanisms
- Effective down to -40 °C
- Non-greasy, smear-free
- Does not affect treated surfaces, rubber and plastics



Multipurpose grease

- · Particularly useful for lubricating chains, gears and moving metal parts as well as hinges, locks and pivots
- · Resistant to friction and weather
- · Highly resistant to high temperatures (up to 210 °C)
- Highly adhesive. Does not drip



		£
9720 (1)	097200040	£7.35 £ 5.00

9720 (2) 097201040

	== 	£
9745 (1)	097450040	£9.25 £ 6.00

9745 (2) 097451040



9765 (1) 097650040 £12.10 £ 7.00 9765 (2) 097651040



1838CLAMP

018380310



Rechargeable clamp spotlight with adjustable light beam and 4 light intensities



1600 lm - Ultra high mode 700 lm - High mode

300 lm - Low mode 100 lm - Eco mode

• Rechargeable battery: Li-lon 3.7 V, 5200 mAh

• Can be charged with USB-C cable (included)

• Can be rotated 360°

. Charging time: 4h

· Battery life:

3h - Ultra high mode 5h - High mode 8.5h - Low mode 24h - Eco mode

· 3-LED battery level indicator

• With built-in clamp, can be easily clamped everywhere

1 magnet on back

IP65

• IK07





Rechargeable, compact LED lamp

• Dual light emission: main and spot

• 3 light intensities: main COB LED 300 - 120 lumens spot SMD LED 150 lumens

• Rechargeable battery: Li-lon3.7 V, 1500 mAh

• Charging time: 2.5h

• Battery life: main: 7/3.5h - spot: 6h

 Belt clip/pocket IP65: IK07

USB-C cable included







£ 104.50 £ 58.00

Rechargeable LED inspection lamp, with double light emission, articulated, can be rotated 180°, with swivel magnetic base and hook

• Double light emission:

front: LED COB, 60-700 lumens, can be adjusted with potentiometer spot (head): LED SMD, 120 lumens, ON-OFF switch

Rechargeable 3.6V 2600mAh Li-ion battery

With USB-C port

Supplied with 100-240V / 50-60Hz charger

. Charging time: 4h

 Battery life: front: 2.5-16h spot (head): 10h

• 3-LED battery level indicator

 Magnetic base (with neodymium) magnet), can be rotated 90°

Swivel base hook

IP54

IK07



€70.50 £39.00

Rechargeable, articulated slim 3-LED inspection lamp

· Magnetic base

· Charging time: 2.5h

Battery life: 2-4h/ spot 3h

IP54

IK07

Triple light emission

• front: 100/200 lumens

· back: 180 lumens

• spot (head): 80 lumens



1838E

4 018380270

Rechargeable under bonnet LED lamp

• Triple light emission: 500/1000/2000 lumens

• Can be rotated 360°

• Length range: 116 ÷ 188 cm

Aluminium body

Nonslip rubber hooks

USB-C charge

Supplied with battery charger Input: 100-240V ~ 50/60Hz

Output: DC 5V - 2000 mA • IP 20

• IK 07



2 charging modes: - charge via lamp USB port - charge via internal battery USB port







£ 29.00











£ 179.00

102.00



Li-lon 3.6V - DC 5V - 2000 mA

KIT WIRELESS ((0))

1839W/P2

£ 248,50 £ 129.00

Kit of wireless lamps 1838SW and 1838POCKET. with compatible charging base 1839BRW

- · Wireless rechargeable, articulated LED inspection lamp 1838SW
- Wireless rechargeable, articulated pocket LED spotlight 1838POCKET
- · Wireless charging base 1839BRW, compatible with the lamps of the kit



WITH A NET VALUE OF £14.00 IS INCLUDED IN PRICE



1838SW

£ 54.00 **3** 018380142

Rechargeable, articulated LED inspection lamp and wireless charging

- Rechargeable 3.6V 3.350mAh Li-ion battery
- 2 charging modes:
 - wireless 1839BRW base - power supply with USB-C port
- Charging time:
 - 6.5h with wireless charging base
- 4.5h with power supply
- . Battery life: front: 3-5h
 - spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07

• Dual light emission:

- front: LED COB, 3 light intensities: 250 - 500 -1000 lumens
- spot (head): LED SMD, 200 lumens



£94.00









3 018380080

Articulated pocket LED spotlight, with dual light beam and wireless charging

- · Rechargeable 3.7V 2600mAh Li-ion battery
- · 2 charging modes:
 - wireless 1839BRW base
- power supply with USB-C port
- Charging time:
- 4.5 h with wireless charging base
 - 4 h with power supply
- 3-LED battery level indicator Can be rotated 210°
- Nonslip rubber body
- Magnetic base
- 1 magnet on base Supplied with
- a USB-C cable
- IP65
- IK07

Dual light emission:

- main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens
- spot light: LED SMD, 250 lumens
- Lighting angle:
 - main light: 160°
- spot light: 18°



(((o)))

£ 66.00

£ 38.00



1*839BRW*

3 018390002



Wireless charging base, compatible with 1838POCKET, 1838SW, 1836AW, 1833MW and 1833XSW inspection lamps

- Two charging positions with magnetic connection, for simultaneous use
- · With pull-out support for wireless mobile phone charging
- Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A DC 9V 2A DC 5V 3A
- USB-C port
- IP20
- IK07















POWER TOOLS

Let us introduce our range, Beta Power Tools, which comprises reliable, durable work instruments designed to satisfy every professional's requirements. Beta's family of power tools comprises:

BATTERY TOOLS

CORDED TOOLS

The range of battery tools includes 20V and 12V high-performance machines.

We at Beta relied on these hallmarks to develop a comprehensive line of battery tools, ranging from the

high-torque impact drill to the impact wrench with ½" square drive.
All of Beta's new power tools are equipped with brushless motors and first-rate interior mechanisms, for significantly improved performance and durability of the tool.

The impact wrench with a maximum unscrewing torque of 1200 Nm is no doubt the flagship power tool of the new range, an ideal work partner for anybody who needs unparalleled power and performance.



1972/K12V-10

Ultracompact drill, 12V

- Double mechanical speed with steel gears and 20-position clutch
- Torque up to 30 Nm and 1300 rpm (400 rpm in 1st gear); drills diameters up to 10 mm in steel and 20 mm in wood
- · 2Ah batteries and charge indicator on drill body
- Ergonomic nonslip handle
- Front LED
- 10-mm autochuck
- Belt clip (right/left side)
- Selector switch, screwing-unscrewing-locking modes (for transportation)
- Supplied in a hard case with 2 lithium ion batteries (2 Ah) and quick charger (50 min)



1986/20V-125BMC

3 019860025

Angle grinder, 20V BRUSHLESS, (machine body)

- · Protection against accidental restart
- · Additional handle, can be placed on both sides
- Tool-less disc cover (quick release)
- · Spindle lock device for quick disc changes
- Lock on/off slide switch
- · Air vents protected against dust infiltration and providing optimal cooling
- Disc diameter (not included): 115/125 mm
 Supplied in a hard case, without batteries and charger



Digital BRUSHLESS motor for increased power, reduced energy consumption, extended motor service life, improved power supply from button.

1986/K20-4AH+2AI

20V kit of angle grinder + 2 Ah battery

1986/K20V-125

Angle grinder, brushless, 20V, with slide switch, disc diameter 115/125 mm, protection against accidental restart. tool-less disc cover, additional handle.

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.



£ 595.00

£ 270.00





Beta





1984/K600-4AH+2AH

£ 677.00 £ 345.00

1/2

3-YEAR WARRANTY

-- 019840022

20V kit of reversible impact wrench 600 Nm + 2 Ah battery

1984/K600

Reversible impact wrench, brushless, 20V, 600Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Sunnlied in a hard case complete with 2.4 Ah

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.

Digital BRUSHLESS motor for increased power, reduced energy consumption, extended motor service life, improved power supply from button.

1984/K1200-6AH+4AH

 11984003¹

£ 420.00

20V kit of reversible impact wrench 1200 Nm + 2 Ah battery

1984/K1200

Reversible impact wrench, brushless, 20V, 1,200 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Supplied in a hard case complete with 2 6 Ah

Supplied in a hard case complete with 2 6 A batteries and quick charger.





Digital BRUSHLESS motor for increased power, reduced energy consumption, extended motor service life, improved power supply from button.





1850D £ 129.00 £ 71.00 **3** 018500018 3-speed heat gun 1800W **Functions:** Heat shrinking · Stripping paint, softening PVC parts Soldering, welding Shrinking cables • Thawing, drying, disinfecting Pos. I 250 I/min 50 °C Pos. II 250 l/min 400 °C Pos. III 500 l/min 550 °C Treating glued parts 4 nozzles included °C ٧ L mm H mm W I/min 255 210 1800 220/240 250/500 50-550

1273MQ/D6

€ 68.00 £ 40.00

Set of 6 screwdrivers

1274MQ **●** 3x100-4x100-5,5x125 mm EN 60900 **☆1000 V**







1760PT/N £ 112.00

017600155

£ 64.00

Voltage and continuity tester, 1000 V

Voltage and continuity tester: accuracy and reliability with up to 1000V power. Equipped with a high-visibility digital screen and a convenient self-test function, the tool ensures both accuracy and reliability in each measurement, which makes it a must-have for every professional.

Features: • Voltage: 24÷1000VAC / 6÷1000VDC Bar voltage indicator: 6-12-24-50-120-230-400-690-1000 Accuracy: ± (3% + 3)V Response time: < 1s (09%) Maximum absorbed current @1000V: < 3,5mA

• Contact-free voltage detection: > 90VAC

Phase rotation test:100÷1000VAC (50/60Hz)

Phase angle: 120° ±5°
Continuity test:0±1.3 MΩ

• Current (continuity test): ≤5 µA

Pollution level

· Power supply

1997MQ/GM

Composite insulating gloves

EN 60903 EN 61482

CLASS 0



	G	DESCRIPTION IN	£
1997MQ/GM 9	9	019970109	£ 159:00 £ 89.00
1997MQ/GM 10	10	019970110	£ 159.00 £ 89.00

1760OHM/2

017600027

£365.00 £ 205.00

Megohmmeter for high voltage insulating testing

Our megohmmeter is synonymous with technology and accuracy for really professional measurements. With an insulating capacity up to 100 $\mbox{G}\Omega$ at 1000V voltage, this instrument is ideal for professional, accurate measurements in all electrical applications. Particularly suitable for electric and hybrid cars.

Features:

- Insulation test up to 100 $G\Omega$ with 1000V voltage
- Large direct reading display, backlit
 Water protection: IP67
- Rubber terminal base for enhanced operating comfort
- Double insulated terminals CAT IV 600V, CAT III 1000V
- · Ideal for electric and hybrid cars



£ 1,205.00



AC voltage: DC voltage: Resistance: Insulation test 0.01Ω - 100GΩ @1000V: Frequency 1~1KHz

Measuring range 10V - 600V 0V - ±600V 0.01Ω - 200Ω $\pm(1.5\% +5)$ $\pm(1.5\% + 5)$ $\pm(2\% + 5)$ ±(1.5% +5)

 $\pm(0.1\% + 3)$

2115PL-MQ32

Assortment of 32 insulated tools for hybrid cars, in plastic tool box with soft thermoformed tray

Quantity/Description Beta N. 1/2" reversible ratchet 920MQ/55A single ring wrenches 10-12 mm 89MQ magnetic bit holder, insulated ® 1/4" 850MQ set of 10 bits with magnetic bit holder O T7-T8-T9-T10-T15-T20-T25-T27-T30-T40 hexagon sockets O 8-10-12-13-14-17-19 mm 861TX/A10 920MQ/A 920MQ/21 920MQ/22 1/2" square drive extension bar 125mm 1/2" square drive extension bar 250mm slip joint pliers, boxed joint 250mm 1048MQ combination pliers 1000V = 180mm 1150MQ extra-long bent flat nose pliers = 160mm 1164MQ screwdrivers for cross head Phillips® screws, 1000V € 4.5X80-6X100 mm 1272MQ screwdrivers for headless slotted screws, 1000V ● 3X100-4X100-5.5X125 1274MQ insulating gloves, made from latex G2 1997MQ/GM tool box, long series, made from plastic





£2,170.00 934.00

5100 RSC51-MQ38

Service tool trolley with 3 drawers and assortment of 38 repair and maintenance tools for hybrid and electric vehicles

RSC51-R

- ABS reinforced worktop, solid and sturdy
 Multipurpose top with anti-fall edges and 8 holes

- Indiapurpose top with anti-fair edges and 6 noies for accommodating screwdrivers
 3 drawers (588x367 mm)
 with ball bearing slides, 70 mm high
 Drawer bases protected by foamed rubber mats
 Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- Front centralized safety lock

- · Convenient side screwdriver holder included
- Two built-in side spray can holders
- · Large lower shelf protected

TR

- by an anti-oil and anti-petrol rubber mat
 4 castors, Ø 125 mm: 2 fixed castors
- and 2 swivel castors (one with brake)

 Capacity of each drawer: 15 kg,
 evenly distributed

Beta N.

1777MQ/U M161



Quantity/Description

7	3 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	52MQ	
3	single ring wrenches 10-12-13 mm	89MQ	M159
7	bi-hex sockets O 8-10-12-13-14-17-19 mm	910MQ/B	M159
1	3/8" drive, T-handle	910MQ/T	M159
1	3/8" drive reversible ratchet 203 mm	910MQ/55	M159
3	socket drivers for Torx [®] head screws ○ TX20-TX25-TX30	910MQ/TX	M159
1	3/8" drive extension 140 mm	910MQ/21	M159
1	slip joint pliers, boxed joint 250 mm	1048MQ	M161
1	diagonal cutting nippers 1000V ₹ 160 mm	1082MQ	M161
1	electrician's scissors 145 mm	1128MQ	M161
1	combination pliers 1000V = 180 mm	1150MQ 180	M161
1	extra long flat nose pliers = 160 mm	1162MQ	M161
1	extra-long bent flat nose pliers = 160 mm	1164MQ	M161
4	screwdrivers for cross head Phillips® screws, 1000V	1272MQ	M161
	● PH0-PH1-PH2-PH3		
4	screwdrivers for headless slotted screws, 1000V	1274MQ	M161
	● 2,5x75-3x100-4x100-5.5x125 mm		

2400 RSC24/6-VEM 24004016

cable stripping knife, insulated 190 mm

Mobile roller cab with 6 drawers and assortment of 85 repair and maintenance tools for hybrid and electric vehicles





₹1000 V





M161





Automatic hose reel

- Automatic hose reel, shockproof plastic body, for air or water
- Max. operating pressure: 15 barBraided polyurethane hose
- Polypropylene frame
- Device for automatically fixing hose at required length
 Rack mechanism can be disabled to keep hose pulled
- Water operating temperature range: -5 °C / +50 °C
- Supplied with a 180° swivel bracket and an additional quick connection bracket

	Hose	Ø GAS BSP	Lm	ESTATE N	£
1900S 8X10	Ø 8x12 mm	1/4"	10	019000080	£166.00 £ 89.00
1900M 8X15	Ø 8x12 mm	1/4"	15	019000085	£227.00 £ 121.00
1900M 10X15	Ø 10x14 mm	3/8"	15	019000115	£236.50 £ 130.00
1900M 12X15	Ø 12x16 mm	1/2"	15	019000125	£309:00 £ 167.00





1844 15-H05

Automatic cable reel, with 3Gx1.5 mm² cable

- 3Gx1.5 mm² cable
- With thermal protection switch
- Cable length out of drum: 1 m (except for 1844 30-H05, 2 m)
- Supplied without incoming cable

- Supplied without incoming cable
 Rack mechanism can be disabled to keep cable pulled
 Max. power (rolled up): 1500W (230V-20°C)
 Max. power (unrolled): 2500W (230V-20°C)
 Supplied with a 180° swivel bracket and an additional quick connection bracket









	Cable	Lm	N° Schuko	ESTATE N	£
1844 15-H05/SCK	H05VV-F	15	1	018440316	£224:50 £ 130.00
1844 15-H05/3SCK	H05VV-F	15	3	018440319	£229.50 £ 133.00

018450403 Automatic cable reel, with 3Gx2.5 mm² cable and TYPE 2 socket for charging electric vehicles

• 3Gx2.5 mm² cable

1845EM/3

- With thermal protection switch
- Cable length out of drum: 1 m
- Supplied with a 1.5-m-long incoming cable and a TYPE 2 socket
- · Rack mechanism can be disabled to keep cable pulled
- Max. power: 3000W (230V-50Hz-16A)
 Supplied with a 180° swivel bracket and an additional quick connection bracket





Since 2022 the established, authoritative welding specialist, Helvi, and Beta Utensili have been working together to develop ground-breaking technologies. This joint effort has translated into the new range of Beta by Helvi welding machines, which boast ultimate performance in line with its high quality standards.

Easy-to-use inverter welding machines with excellent welding characteristics for all types of electrodes. With overvoltage and overtemperature control and electrode anti-sticking function. Compact and lightweight, ideal for home maintenance jobs, light carpentry and maintenance jobs.





1498/PR

Conventional battery charger

· For lead-acid storage batteries

Beta

- Voltage/current selectors
- Ammeter
- Automatic thermal overload protector
- · Reverse polarity protector



Conventional battery charger, 6/12 V



Conventional battery charger, 12/24 V



Conventional battery charger, 12/24 V



1498/PR14 1498/PR17 1498/PR20

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	140 W	300 W	390 W
Voltage	6/12 V	12/24 V	12/24 V
Maximum current	11 A	12,5 A	16 A
Charging current	7,5 A	8,5 A	11 A
Charging capacity	112 Ah 15h	128 Ah 15h	165 Ah 15h
Charging positions	2	2	2







Conventional battery charger, 6/12/24 V

• For large charging stations

- For lead-acid storage batteries
- Voltage/current selectors
- Ammeter
- Automatic thermal protector





Conventional battery charger, 6/12/24/36/48 V

1498/PR25 1498/PR35B

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	620 W	1830 W
Voltage	6/12/24 V	6/12/24/36/48 V
Maximum current	25 A	38 A
Charging current	17 A	25A
Charging capacity	255 Ah 15h	375 Ah 15h
Charging positions	6	12







Automatic conventional battery charger 12/24 V

- For AGM, GEL, Lead-Acid and Start/Stop batteries
- Electronic control of charging current
- Charging status light indicators
- Charging current regulation via potentiometer
 • Automatic charging function
- Maintenance function



Power supply (1ph)	230 V - 50/60 Hz
Power	720 W
Voltage	12/24 V
Maximum current	30 A
Charging current	20 A
Charging capacity	300 Ah 15h
Charging positions	∞

1498/SP

Conventional battery charger / starter

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- . Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector



1498/SP15 **014980745**

Conventional battery charger, 12 V



Conventional battery charger, 12/24 V

1498/SP150 1498/SP250

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	190 W	650 W
Voltage	12 V	12/24 V
Maximum current	15 A	27 A
Charging current	11 A	18 A
Max. boost current	120 Acc	200 Acc
Starting current	85 A	135 A
Charging capacity	165 Ah 15h	270 Ah 15h
Charging positions	2 + boost	2 + boost

1498/SC





• For lead-acid storage batteries

· Slow/fast charging current selector

Ammeter

- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector



1498/SC341 £ 445.00 £ 254.00 **.....** 014980755

1498/SC540 £660.00 £ 378.00 **1** 014980757

1498/SC441 £ 484.00 £ 285.00

1498/SC640

1498/SC341 1498/SC441 1498/SC540 1498/SC640

Power supply (1ph)	230 V - 50/60 Hz			
Power	1080 W	1320 W	1440 W	1800 W
Voltage	12/24 V	12/24 V	12/24 V	12/24 V
Maximum current	45 A	55 A	60 A	75 A
Charging current	30 A	36 A	40 A	50 A
Max. boost current	340 Acc	380 Acc	480 Acc	550 Acc
Starting current	200 A	260 A	330 A	400 A
Charging capacity	375 Ah 15h	450 Ah 15h	525 Ah 15h	600 Ah 15h
Charging positions	3 + boost	3 + boost	6 + boost	6 + boost

1498/RP

Conventional battery charger / starter, 12/24 V

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- Thermostatic long start protectorShort-circuit protection fuse
- · Reverse polarity protector





1498/RP480 **014980751**

319.00

1498/RP380 1498/RP480

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	900 W	1320 W
Voltage	12/24 V	12/24 V
Maximum current	38 A	55 A
Charging current	25 A	36 A
Max. boost current	280 Acc	450 Acc
Starting current	200 A	315 A
Charging capacity	270 Ah 15h	450 Ah 15h
Charging positions	2 + boost	6 + boost

1498/AT

Battery charger / starter

- For lead-acid storage batteries
- · Charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector





Equipped with CPS (car protection system) technology, which allows boost function to be activated and deactivated fully automatically, to protect electronics on board vehicle.

1498/AT300 1498/AT500

1498/AT300 **014980760**

£461.00 £ 271.00

Battery charger / starter, 12 V



£ 564.00 £ 305.00

Battery charger / starter, 12/24 V

	1700/71000	1700/71/000
Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	300 W	890 W
Voltage	12 V	12/24 V
Maximum current	25 A	37 A
Charging current	20 A	30 A
Max. boost current	300 Acc	450 Acc
Starting current	210 A	320 A
Charging capacity	375 Ah 15h	540 Ah 15h
Charging positions	2 + boost	6 + boost



Battery charger / starter, 12/24 V, wheeled

£ 904.00 *1498/AT701* £ 518.00 **014980762**

1498/AT1300 £2,540.00 £ 1,458.00 **14980764 14980764**

1498/AT1001 £1,485.00 £ 849.00

£3,590.00 *1498/AT2000* 2,056.00

1498/AT701 1498/AT1001 1498/AT1300 1498/AT2000

	1400/71/01	1700/71/00/		1 100//112000
Power supply	(1ph) 230 V - 50/60 Hz	(3ph) 230 V - 50/60 Hz	(3ph) 230 V - 50/60 Hz	(3ph) 230 V - 50/60 Hz
Power	1800 W	2200 W	2900 W	3600 W
Voltage	12/24 V	12/24 V	12/24 V	12/24 V
Maximum current	75 A	90 A	120 A	150 A
Charging current	50 A	60 A	80 A	120 A
Max. boost current	550 Acc	980 Acc	1280 Acc	2000 Acc
Starting current	400 A	560 A	850 A	1100 A
Charging capacity	600 Ah 15h	1350 Ah 15h	1800 Ah 15h	2250 Ah 15h
Charging positions	6 + boost	14 + boost	12 + boost	12 + boost



1498/DG





Electronic battery charger / starter, 12/24 V, wheeled

Equipped with CPS (car protection system) technology, which allows boost function to be activated and deactivated fully automatically, to protect electronics on board vehicle.

- For Lead-Acid, AGM, Gel, Ca/Ca and Start/Stop batteries
- Electronic charge control via microprocessor
- Charging time setting
- Digital display
- Charging status LED indicators
- Control system for: reverse polarity, overcurrent, battery failure indication, safe start, protected start



Battery charger / starter. 12V



Battery charger / starter, 12/24 V

1498/DG540E 1498/DG1100E

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	1320 W	2400 W
Voltage	12/24 V	12/24 V
Maximum current	55 A	100 A
Charging current	36 A	70 A
Max. boost current	380 Acc	580 Acc
Starting current	260 A	400 A
Charging capacity	810 Ah 15h	5000 Ah 15h
Charging positions	4 + boost	4 + boost + supply

1498H

Electronic multipurpose battery charger

Electronic battery chargers 1498H: innovation and technology made to work for professionals! Fitted with LCD displays and 3-colour LED indicators, they can be used with all types of batteries, both lead-acid and lithium. The electronic control card provides full protection against unexpected events. The 9 automatic charging steps ensure fast, efficient charging, with recovery and desulphation features.

- LCD display
- 3-light intensity LED
- · Charging and charge maintenance
- Protection against reverse polarity, short-circuits, overheating, overloading, overtemperature
- Spark protection
- 9 charging steps

- Floating system
- · Functions: battery recovery, battery test and desulphation
- Clamp holder
- Reclining fixing hook
- Supplied accessories: cable with clamps, cable with eyelets

£ 271.00



£ 149.50 £ 84.00 1498H/16A **014980216**

£ 155.00

Electronic multipurpose battery charger, 6/12 V Electronic multipurpose battery charger, 12/24 V



£ 290.00 1498H/25A £ 164.00 **014980225**

Electronic multipurpose battery charger, 12/24 V Electronic multipurpose battery charger, 12/24 V

	1498H/4A	1498H/8A	1498H/16A	1498H/25A
Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Charging current	1-4 A	2-8 A	4-16 A	6-24 A
Battery types	Pb - GEL - Ca/Ca - AGM - Start/Stop - Lithium (LiFePo4)			
Charging capacity	5-80Ah (LiFePO4 1-80Ah)	10-160Ah (LiFePO4 2-160Ah)	20-360Ah (LiFePO4 4-360Ah)	30-550Ah (LiFePO4 6-550Ah)
Maintenance capacity	5-120Ah (LiFePO4 1-120Ah)	10-250Ah (LiFePO4 2-250Ah)	20-550Ah (LiFePO4 4-550Ah)	30-800Ah (LiFePO4 6-800Ah)
Power supply (DC)	N/A	13.8V - 5A	13.8V - 12A	13.8V - 20A
Output voltage	6-12V	12-24V	12-24V	12-24V
Degree of protection	IP65		IP	20

1498PRO

Portable starter, Pro

- Graphic display with ammeter and charging status indication
- · Charging via automatic electronic power supplier
- Charging via cigarette lighter socket
- Internal protection fuse
- Shoulder strap included
- Sealed lead-acid storage battery (AGM)



















Portable starter, 12 V Pro

- · For starting all GT and economy cars, 12V, petrol or diesel
- Pickup current: 3200A
- Battery capacity: 25 Ah

Portable starter, 12/24 V Pro

- For starting all vehicle types with 12V or 24V batteries
- Pickup current: 5000A 12V 2500A 24V

CE

Battery capacity: 2 x 20 Ah

1498EL

Portable starter

- · Charging via automatic electronic power supplier
- · Charging via cigarette lighter socket
- Internal protection fuse
- · Battery charging status LED indicator
- Shoulder strap included
- · Sealed lead-acid storage battery (AGM)







£ 270.00

Portable starter, 12 V

- · For starting all GT and economy cars, 12V, petrol or diesel
- Pickup current: 1800A
- · Battery capacity: 22 Ah



Portable starter, 12/24 V

- For starting all vehicle types with 12V or 24V batteries
- Pickup current: 3600A 12V 1800A 24V
- Battery capacity: 2x 22 Ah

3 014980040


Multipurpose portable starter, 12V

· Device protecting against polarity reversal, short-circuit, overcurrent, overcharge and overheating

Supplied with:

- Protective case
- Cable with starting clamps
- USB ports for charging electronic devices
- LED battery charge indicator
 USB and USB-C cable
- · Mains power supply
- Multifunction LED torch





£327.00 £ 186.00

1498LT

Portable high-performance starter, ultralightweight

The microprocessor provides full protection against:

- Polarity reversal
- Short circuits
- Incorrect voltage
- Overloads
- Underdischarge
- Overcharge
- Overtemperature



1 014980012 • Net weight: 2.5 kg

Cable length: 500 mmComplete with charging power supply 12 V 1.3A








1 014980014

£1,655.00 £ 934.00



Automatic power supply: 4 Amp

• Cable length: 160 cm Cable section: 25mm²





1498LT/12 1498LT/12-24 12V 12/24V Operating voltage 2000/1000 A Continuous amperage 800 A 5000/2500 A Maximum starting amperage 2000 A Peak amperage 4000 A 10000/5000 A Clamp amperage 1000 A 1000 A Cable length 500 mm 1600 mm 4 cells LifePo4 Battery type 4 cells LifePo4 Memory saving function YES YES 260x135x72 mm 350x240x140 mm Dimensions

1498TB/12-24N

014980402

Digital battery tester, 12-24V, with built-in printer

- Allows the following to be tested: battery, alternator, starter and system
- · Reverse polarity protector
- · Fitted with software for connecting instrument to PC
- Backlit display
- · Compact, shockproof frame
- 9 language software

- Technical data:
 Applications: 12V and 24V batteries
 Operating range: 100-2000 CCA
- Reference standards: CCA,SAE,DIN,EN,IEC,JIS, MCA, GB, BCI, CA
- Supported batteries: PB, WET, GEL, AGM, AGM FLAT, EFB, SLI
- Voltmeter: 9V-30VCable length: 1800 mm
- Included accessories: USB cable, 3 printer paper rolls

for use with main diagnostic tools

3 014970300 Assortment of 94 car testing connectors

Assortment contents:

- 2 t-taps
- 2 potentiometers
- 2 warning lights
- 2 SRS connectors
- · 2 alligator clips
- 2 acicular probes
- 2 prods
- 2 dual banana connectors
- 4 single banana connectors
- 24 flat male terminals 0.6÷6 mm
- 24 flat female terminals 0.6÷6 mm
- 12 round female terminals 1.6÷3.9 mmm



£ 744.00 £ 420.00

1497/C23

3 014970200

Assortment of 23 tools for releasing electrical connectors

£ 223.50 130.00





1760DGT/2

<u>---</u> 01760000<u>8</u>

Digital automotive multimeter, portable, with 2-channel oscilloscope and waveform generator



Kit Contents:

- Multimeter tips
- 2 BNC crocodile clips for oscilloscope
- Tip probe for oscilloscope (1X and 10X)
 Battery charger
 Nylon sheath

Max. voltage	600V DC
Max. current	10A DC
Max. resistance	40MOHM
Max. capacity	100uF
Display	2.8" colour TFT
Resolution	320 x 240 pixels
Power supply	100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
Battery	2 x 2600 mAh



Oscilloscope Specifications: Horizontal

Bandwidth: 40MHz



- Vertical
 VOLTS/DIV range: 10mV/div÷10V/divat BNC input
- Selectable analogue, bandwidth limit, typical: 20MHz
- Low frequency response (-3db): ≤10Hz a BNC
 DC Gain Accuracy: ± 3% for Normal or Medium acquisition mode, 10V/div ÷ 10 mV/div

Trigger

- Type: Edge
- . Mode: Auto, Normal, Single
- Slope: Rising, Falling, Rising, & Falling
 Source: CH1, CH2

- · Coupling: DC, AC or GND
- Supported probe attenuation factors: 1X, 10X, 100X, 1000X

Arbitrary waveform generator

- Waveform frequency: Sine (1Hz+25MHz),
- Square (1Hz÷10MHz), Ramp (1Hz÷1MHz), EXP (1Hz÷5MHz)
- Width: 2.5Vpp (50Ω) 5Vpp (high impedance)
 Output impedance: 50Ω

1760DGT

4 017600005

£ 131.00

Digital automotive multimeter

Technical Data:

- RPM (tachometer): For 2 and 4 cylinder engines RPM4 600 - 4000 RPM RPM4 600 - 12000 RPM (x10 RPM) RPM2/DIS 300 - 4000 RPM RPM2/DIS 300 - 6000 RPM (x10 RPM)
- Dwell angle: 4-8 CYL
 DC voltage: 400mV-4/40/400/1000V
 AC voltage: 4/40/400/700V
 DC current: 40/400mA-4/20A

- AC current: 40/400mA-4/20A
- AC CURTENT: 40/400mA-4/20A
 Resistance: 400Ω-4/40/400kΩ-4/40MΩ
 Capacity: 40/400nF-4/40/100μF
 Frequency: 5/50/500Hz-50/500-10MHz
 Duty cycle: 0.1 % 99.9%
 Pulse amplitude: 1 10ms

- · Diode test: Test current 0.3mA
- Continuity: $<150\Omega$ Test current <0.3mA
- Display: High-contrast, backlit 4-digit LCD
 Overvoltage: Category II 1000V
 Auto power off: 30 minutes
 Power supply: 1 9V battery (included)

- Inductive clamp (included)
- 2 tips (included)
 Soft cloth case (included)





1760B **3** 017600012

Digital multimeter **SPECIFICATIONS**

SPECIFICATIONS
DC voltage: 200 mV-2/20/200/1000
VAC voltage: 2-20/200/700VDC
current: 2/20/200 mA-20 AAC
current: 2/200 mA- 20 A
Resistance: 200Ω - 2/20/200 kΩ - 2/20 MΩ
Capacity: 2/20/200 nF - 2/200 μF
Temperature: -20° + 1000°C/ -4 °F ~ +2000°F

Frequency: 20kHz

Power supply: 1 9V battery (included)



£ 93.00





1*760PA/80*

£ 222.00 128.00

AC/DC amperometric clamp, 80A Specifically designed to measure low current leakage or absorption values on vehicles

SPECIFICATIONS

- Range: 1mA-80A AC/DC
- Torch function with white LED
- Backlit LCD display
- · Zero setting function
- Hold function
- Auto power off
- Power supply: 2 1.5V AAA-type batteries

IDEAL FOR LOW LEAKAGE **VALUES 1MA-80A**





1760PA/AC-DC

£329.00 £ 186.00

Amperometric clamp and digital multimeter

Measurable parameters: DC voltage: 0.1mV ÷ 600V AC voltage: 0.1mV ÷ 600V AC current: 0.01A ÷ 1000A DC current: 0.01A ÷ 1000A Resistance: $0.1\Omega \div 40M\Omega$ Capacity: $0.001nF \div 40~\mu F$ Frequency: $0.001kHz \div 4kHz$ Temperature: -40°C ÷ 1000 °C -40°F ÷ 1832°F





1760/TC2 £ 122.00 **3** 017600161

Combination contact/non-contact digital tachometer

Supplied with the following:

- Adaptor for contact tip measurement
- Male (contact) rubber tip (2 pcs.)
- Female (contact) rubber tip (1 pcs.)
- Linear measurement tape (1 pcs.)
- Reflecting tapes
- Instruction manual

TECHNICAL DATA

- · For measuring:
 - non-contact rotational speed (rpm)
- contact rotational (rpm) and linear surface speed (m/min or ft/min).
- 5-digit LCD display.
- Scale:
 - non-contact speed 2.5÷99,999 rpm
- contact speed 0.5÷19,999 rpm linear surface speed 0.05÷1,999.9 m/min.
- Frequency: 0.8 sec.
- Power supply: 4 1.5V batteries (included), AA size, or 6V power supply unit (not included).



£ 230.50

1760PA/AC-DC2000

£ 373.00

Amperometric clamp with digital multimeter and data connection

- Measurable parameters:

 DC voltage: 0.1mV ÷ 1000V

 AC voltage: 0.1mV ÷ 1000V
- AC current: 0.01A ÷ 2000A
- DC current: 0.01A ÷ 2000A • Resistance: $0.1\Omega \div 60M\Omega$

- Capacity: 1nF ÷ 6000 µF
 Frequency: 10kHz ÷ 20kHz
 Temperature: -20 °C ÷ 1000 °C
 -4 °F ÷ 1832 °F
 Power supply: 3 1.5V batteries,
- type AA (included) Data connection (version 4.0)









1760/IR500

-- 017600350

Digital infrared thermometer with dual laser aiming system



TECHNICAL DATA

Temperature range: -50 ÷ 500 °C (-22 ÷ +932 °F) Display resolution: 0.1 °C (0,1 °F) Emissivity: $0.1 \div 1$ adjustable Accuracy: -50 °C $\div +20$ °C (+/- 3 °C); $20 \div 500$ °C (+/-2% or 2 °C) Optical resolution (DS): 12:1

Auto power off: around 10 seconds Operating temperature: 0 °C \div 50 °C Storage temperature: -20 °C \div 60 °C Power supply: 1 9V batteryV









961N

Electronic videoscope with flexible, rotating probe

- TFT LCD 5" screen
- Supports SD cards
- Video and image recording
- 4 LEDs
- Power supply via USB port (built-in battery)
- Rotating probe
- High resolution (1920x1080) for bright images and video
- Probe length: 1500 mm
- Camera diameter: 6 mm







Discover the videoscope, 961N, your versatile partner for all jobs! Based on the probe that can be rotated 360° and the double lit camera reaching the most inaccessible points has never been so easy. Defects and problems can be found easily and accurately. And with the new TFT LCD 5" display and outstanding resolution (1920x1080), you can enjoy sharp, bright images and videos, like never before.

Choose the videoscope, 961N, for uncompromised quality.

















Multi-purpose trolley

Can be used as a mobile workstation for diagnostic tools, laptops, testers and battery chargers.

- Painted sheet metal frame: unparalleled firmness and sturdiness
- Ergonomic handle
- 2 fixed rear castors Ø 160 mm
- 2 steering front castors Ø 100 mm (one with brake)



IDEAL FOR DIAGNOSTICS





£861.00 £ 467.00

Multi-purpose trolley with door, empty

i 36,5 kg

£767.00



🕯 36 kg





2-level top

Pull-out drawer for housing a mini keyboard



1 paper holder



2 useful side containers



4 useful side cable reels made of plastic



1464CBD/N £ 411.00 **...... 014640301**

Comprehensive adapter set for testing compression in petrol and diesel engines, with tester 1464T and 1464T/N

Makes it possible to connect to engine to test petrol and diesel compression with tester 1464T and 1464T/N $\,$ **Contents:**

- 8 dummy spark plugs with non-return valves
- 44 dummy glow plugs with non-return valves
- 1 adjustable universal dummy injector for cars, trucks, marine engines and agricultural machines
- 1 90° adapter, pressure release valve and connecting hose
- space accommodating tester 1464T in case





Set for testing high pressure system in common rail diesel engines. for use with item 1464T and 1464T/N

Allows connection between high pressure pump and injector flute, to test common rail system pressure.

Set contents:

- high pressure hose set:

• T12-M1.5

regulators

- fittings2,000 bar sensor
- · assortment of dummy regulators
- · assortment of injector fuel fitting plugs

510x415x130 mm





Digital pressure and compression tester

- Large digital display, backlit
- Rechargeable polymer lithium battery
- Complete with 80 bar sensor (for low pressure)
- Connection via cable free sensor
- · Measurement and software update download via Wi-Fi
- Shockproof case
- For use in combination with kits 1464 for testing engine pressure and compression

Beta's digital tester, 1464T, can be used to measure numerous parameters in the automotive industry. The 80 bar pressure sensor it is fitted with can be used to test pressure and compression in petrol and diesel engines as well as oil pressure, the low pressure common rail circuit, and perform several other tests. The internal software can be updated via Wi-Fi connection. The result of the measurements is displayed on the 8" touch screen. Data will be represented graphically or numerically, depending on the test that is being performed.



Set of connectors for testing low pressure, for use with item 1464T and 1464T/N

Provide optimal measurements with the set of low pressure adapters: efficiency and lasting performance for your engine. The quick connectors connected to tester 1464T/N make it possible to rapidly test fuel low pressure in diesel and petrol engines as well as AdBlue® and TDI pressure.









Set for testing oil pressure, for use with item 1464T and 1464T/N





£ 388.00 £ 182.00

Set for testing high pressure system in FSI petrol engines, for use with item 1464T and 1464T/N







£ 169.50 £83.00

Set for testing turbo pressure, for use with item 1464T and 1464T/N



3 014640610

£ 192.50 £ 98.00

Set for testing diesel particulate filter (DPF) pressure, for use with item 1464T and 1464T/N

Supplied with:

- 500 mbar sensor
- 8 mm adaptor with quick coupling and T fitting

 • 3-m-long RJ45 cable

Technical data:

- Pressure test: 0÷500 mbar
- · Resolution: 1 mbar



1464VL

£ 102.00

Vacuum testing set, for use with item 1464T and 1464T/N

For measuring and storing maximum vacuum value.

Supplied with:

- 800 mbar sensor
- 6 and 8 mm adaptors
- 3-m-long RJ45 cable

Technical data:

- Vacuum test: 0÷800 mbar
- · Resolution: 1 mbar
- · Maximum value storage







Exhausted oil drain unit

- · Level indicator
- · Big diameter pan with breakwater grate; capacity: 12 I
- Pneumatic tank emptying through 1.8 m pipe
- Tool tray



Exhausted oil drain unit, wheeled, with 90 I tank



Exhausted oil drain unit / vacuum cleaner, wheeled, with 90 I tank and pre-chamber

- Transparent pre-chamber: capacity 9.5 I
- Pneumatic tank emptying through 1.8 m pipe

Standard accessories:

- 1 hard probe, Ø 5x700 mm
- 1 flexible probe, Ø 5x700 mm
 1 hard probe, Ø 6x600 mm
- 1 flexible probe, Ø 6x700 mm
- 1 flexible probe, Ø 7x700 mm • 1 flexible probe, Ø 8x700 mm
- Adapters for VW, BMW, CITROËN





4 018770180

£ 542.00 £ 237.00

Exhausted oil drain unit, wheeled, with polyethylene tank

- Tank capacity: 40 I
- Large oil pan made of PP
- Level indicator
- · Pneumatic drum emptying



1877F

3 018770100

£ 95.00 £ 55.00

Exhausted oil drain unit for 1 I bottles

- Fits up to 4 bottles at a time
- Supplied with 2 2-I jerrycans

FITS UP TO 4 BOTTLES AT A TIME









£ 326.00

Steel handling and storage base for 2 200-l barrels

- Easy to carry with a fork lift truck or a pallet jack
- Support cannot be placed under any part
- Completely hot painted with epoxy powder, for high resistance to chemicals



TANK CAPACITY:





Oil suction gun, 200 ml, made from polypropylene

- · For transferring oil and brake fluid
- Operating temperature: +0 °C ÷ +50 °C
 Not suitable for fuel and flammable liquids
- Usable minimum oil density: lower than SAE30





Pen oiler

- With non-slip knurl
- Operating temperature: -10 °C +60 °C
- . Minimum density of SAE 10 oil



4 018800001

£ 57.00 £ 32.50

Manual oil barrel pump

- For oil
- . Do not use with aqueous fluids, acid solvents, Diesel oil, petrol and the like
- Complete with barrel connection, telescopic tube and delivery spout

 For use with 60, 100 and 200 I barrels



£37.00 £ 21.00

Non-return funnel for AdBlue®. with 45° coupling







Non-return funnel

with quick couplings Particularly suitable for VAG cars.

NON-RETURN






£36.00

£ 21.00









	Ø mm		£
1488	60÷110	014880001	£92.00 £ 46.00
1488L	60÷160	014880050	£ 100.50 £ 52.00

1488/1 <u>--</u>. 0148<u>8001</u>0

£ 106.00 £ 46.00

1/2

Oil-filter wrench with thin double chain



£ 59.50 £ 35.00

Quick coupler swivel pliers for fuel pipes, with articulated jaws







	Ø max mm		£
1490/1	160	014900001	£36.50 £ 18.00
1490/2	240	014900002	£39.00 £ 20.00

1491 **3** 014910001

£47.00 £ 24.00

£ 268.00

£ 129.00

Adjustable oil filter wrench



1493/C30

3 014930000

Ø mm

60÷110

Set of 28 oil filter wrenches

- For tightening and loosening oil filters
- 1/2" female driveIn plastic case



Sizes included in kit

Sizes included in Kit (Ø mm / n° sides) 1493: 65/14 - 67/14 - 68/14 - 3/14 - 74/15 -76/15 - 75.77/15 - 76/14 - 76/8 - 78/15 -80/15 - 82/15 - 86/16 - 90/15 - 92/10 -93/15 - 95/15 - 100/15 - 106/15 - 108/15

1493PF (Purflux) 66/6 - 76/12 - 76/30- 86/18 93/36 - 93/45 - 96/18 - 108/18

Includes 1 adjustable oil filter wrench Ø 65÷120 mm



1899A/N-M

£ 747.00

DPF/FAP® system cleaning machine

Supplied with:

- 1 2-m-long feed pipe
- 1 quick coupler + hose nozzle for differential sensor hoses
- 1 niplex M18x1.5 with hose nozzle for direct connection to lambda probe
- 1 extension hose

- 1 DPF/FAP® spray nozzle
 1 magnetic pipe support
 1 DPF/FAP® pipe with adjustment cable gland plus niplex M14/16/18 mm for connecting lambda probes

Technical specifications:• Operating voltage: 12 V

- Power supply cord length: 3.9 m
- Tank capacity: 1 I



1852R1750

3 018520175

Portable induction heater

- · Heats and loosens bolts, hubs and bearings without using flames.
- Allows any type of ferromagnetic metal to be heated.

BENEFITS

- 1 Time saving: quick, extremely accurate heating
- 2 Fire safety: does not produce flames, maximum operator safety
- 3 Functional: can be used with one hand, and coils can be easily interchanged

Fields of Application:

- Automotive industry
- Industrial maintenance
- Aviation industry
- Naval industry
- Petrochemical industry

Technical data:

- Input voltage: 230V AC, 50/60 Hz
- Input current: max. 7,5A
- Power: max. 1.75 kW





1852RL3700

018520370

Portable induction heater, 3.7 kW, with coolant

The liquid-cooled portable induction heater is the ideal solution for the quick, efficient heating of ferromagnetic and conductive materials. The 2-m-long inductor results in remarkable versatility, catering to different work requirements.

BENEFITS

- 1 Time saving: quick, extremely accurate heating
- 2 Fire safety: does not produce flames, maximum operator safety
- 3 Functional: can be used with one hand, and coils can be easily interchanged







- Automotive
- · Garages/vehicle repair
- Railway and naval industryHeating and piping installation
- General maintenance

Technical data:

- Input voltage: U1 230 V 50/60 HzInput current: I1 16 A
- Max. power: P2max 2400 W



£ 158.00

Leakage tester for petrol engine cylinders

After compressed air has been introduced into cylinder, gauge will allow it to be tested for compression leaks.

Supplied couplers:

M10 - M12 - M14 - M14 long



373x295x70,6 mm



£ 188.50

1

009600218

£ 111.00

Kit of brushes for cleaning injector seats

Kit contents:

- 12 nylon brushes, 8÷19 mm (1 mm interval)
 12 steel brushes, 8÷19 mm (1 mm interval)
 12 brass brushes, 8÷19 mm (1 mm interval)
- 1 bit holder with quick coupling and magnetic bottom
- 1 extension with quick coupling and magnetic bottom



960KC-M8/M9/M1

£ 250.00

Assortment of tools for removing broken or damaged glow plugs



960KPC

4 009600780

£313.00 £ 184.00

Reversible impulse extractor with adjustable torque for glow plugs



- Pneumatic extractor with adjustable torque and special sockets allow jammed glow plugs to be unscrewed, thereby minimizing damage risk
- 5 1/4" impact sockets, long series, specially designed for glow plugs: 8-9-10-11-12 mm, 2 extensions and 1 articulated joint
 4 adjustable driving torques: 10-20-30-40 Nm
- Right-hand and left-hand adjustment



1884

3 018840010

£479.00 £ 280.00

Oil filler tool for manual and automatic gearboxes and differentials

Complete with 12 adaptors for direct connection

- Fitted with nonreturn valve
- for leakage-free oil filling

 Delivery: 70 cc per pump shot
- Tank capacity: 7.5 I
- Maximum permissible oil viscosity: SAE 140









£ 242.00

Cooling system washing tool

Based on the use of compressed air, high water pressure allows for effective cleaning system washing.

- Supplied with 6 system connection adapters
- Operating lever with position locking for continuous use
- Supplied with a water quick coupling







1759HD/3

3 017590063

£ 569.00 £ 280.00

Cooling system seal testing and circuit filling tools





£2,490.00 £ 1,215.00

Assortment of common rail diesel injector pullers

Allows DELPHI-BOSCH-SIEMENS-DENSO injectors to be removed

- Mechanical and hydraulic operation
 Includes one 12-t hydraulic jack
- · Can be directly used on vehicle with mounted engine
- · Numerous adjustment options on head make it possible to work on most engines available



1477/C38

014770338

£ 224.50 130.00

3/8

Kit with swivel ratcheting wrench, with short sockets for belt tighteners

Kit contents:

- Swivel lever with 500-mm long reversible ratchet
 Short sockets for Torx® head screws: E10-E12-E14-E16-E18
- · Short hexagon sockets: 8-9-10-11-12-13-14-15-16-17-18-19-24
- Bits for Torx® head screws: T20-T25-T27-T30-T40-T45-T50-T55-T60
- Bits for cross head Phillips® screws: PH2
 Hexagon bits: 4-5-6-7-8-10 mm

- Magnetic bit holder
 3/8" extension, 75 mm



1462/KEP

£374.00 £ 218.00

₫ 4,8 kg

Pneumatic diesel injector puller

Features:

- Remote operation control
- Convenient positioning handle
- Threaded connection M18X1.5
- Slide hammer travel: 35 mm
- Slide hammer speed: 1200 bpm

Connectors included in kit:

- M14X1.5 for Delphi
- M17X1.0 for Bosch
- M20X1.0 for Denso
- M25X1.0 for Siemens
- M27X1.0 for Siemens





1895

Ultrasonic cleaning tank with special degas function

- · Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (carburettors, valves etc.)
- Digital display for temperature
- and cleaning time selection
 Two cleaning modes: "soft" and "normal"
 For normal cleaning, just use water at a temperature of 50/60 °C
- For more accurate cleaning, add non-foaming detergent solutions specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency

	1 <i>895 6</i>	1895 13	1895 27	1895 157
Tank capacity	6 litres	13 litres	27 litres	157 litres
Drain tap	V	~	V	✓
Power	150 Watt	300 Watt	500 Watt	2160 Watt
Heating power	300 Watt	400 Watt	500 Watt	5000 Watt
Temperature range	0÷80 °C	0÷80 °C	0÷80 °C	30÷110 °C
Cleaning time range	0-99 minutes	0-99 minutes	0-99 minutes	0-59 minutes
Frequency	40 kHz	40 kHz	40 kHz	28 kHz - 40 kHz
Power supply	220/230V	220/230V	220/230V	220/380V
Dimensions	330x180x310 mm	350x325x320 mm	530x330x380 mm	840x640x750 mm
Tank size	300x155x150 mm	325x235x145 mm	500x300x200 mm	700x500x450 mm











£711.00 £ 411.00

6 *I*

13 I

27 *I*



£1,101.00 £ 635.00



£1,535.00 £ 887.00 Beta

1895 157 **018950357**

£7,060.00 £ 3,739.00

157 I

£ 140.00

£ 79.00

ULTRASONIC CLEANER

Industrial alkaline detergent for ultrasonic tank







1000 ml



1895GSI **018950810**

Control generator for (petrol and LPG) electro-injectors

Technical specifications:

- Power supply: 110V o 220V
 Test duration: 0~99 min.
- RPM: 600~4000





This tool relies on reduced dimensions and latest-generation software, to allow all electroinjectors to be activated, and functional, accurate diagnoses and cleaning to be performed.



£ 2,243.00

£4,550.00

1898/K40

Eco friendly. heated manual cleaning tank

- Using the bio-active liquid included, oil and residue can be effectively removed from mechanical parts without the need for aggressive chemicals
 • The bio-active liquid converts the oil and
- other residue into carbon dioxide and water which can bere-used again and again
- No need for specialist waste collection and disposal
- Suitable for both metal and plastic parts

Equipment:

- Long bristle brush and connecting pipe
- Right-hand and left-hand operation function
- Perforated stainless steel grid
- Wheels with brakes
- · Card with display operating temperature and low level alert

Accessories Included:

- 2 20 I cans of environmentally friendly liquid detergent and 2 packs of bacteria





ATTENTION:

Countries where product 1898/K40 is allowed to be distributed: Austria, Belgium, France, Hungary, Italy, Netherlands, Poland, Portugal, Spain, United Kingdom.

Max. pump capacity	10 I/min
Tank capacity	40 litres
Operating temperature	+5°C ÷ +40°C
Weight	50 kg (when empty)
Dimensions	710x370x200 mm

1466/C5 £ 74.00 **3** 014660100

Kit of 5 brake bleeding wrenches

Kit contents:

- 5 wrenches sizes 7-8-9-10-11 mm
- 1 drain hose with check valve



1471M/C22

3. 014710101

£ 128.00

Pneumatic tool for pushing back and rotating right and left disc brake pistons with accessories

Automatic jack

 New assortment complete with all new adaptors

Thrust: 150 kg

Operating pressure 5÷8 bar



1471C

3 014710330

£61.50 £ 36.00

£ 305.00

£ 164.00

Tool for manually pushing back brake pistons, with ratchet

The tool for manually pushing back brake pistons, fitted with two swivel plates and a ratchet movement mechanism, means an effective, flexible solution for quick jobs - e.g. on commercial vehicles.





£73.00 £ 43.00

Impact socket kit for brake calipers nuts

For cars of Volkswagen, Audi & Porsche group • 3 10-tooth sockets: 11.5 mm -

- 15 mm 20 mm
- 2 7-tooth socket: Ø 14 mm 22 mm

Ø mm	L mm
25	50











7 teeth

10 teeth





£ 158.00

£271.00 £ 158.00

B

1467LF/2

3 014670099

£1,780.00 £ 934.00

 (ϵ)

Electric instrument for brake fluid replacement

Allows brake fluid to be easily and quickly replaced on vehicle

- Automatically stops when tank is empty, thereby preventing air from being let in
- Maximum tank volume: 20 I
- Operating pressure: 0.4÷3.5 bar
 Power supply: 230V

Supplied with:

Brake oil recovery tank

• 1 standard cap E20

"PULSATING EFFECT"











1467

= 014670001

Brake fluid extractor

Pressure: min 5 bar, max 11.5 bar



1467T/C6

3. 014670080

Set of adapter plugs for brake fluid tanks, for use with BETA items 1467LF and 1467LF/2

Set contents:

- 1 plug for Toyota vehicles
 1 plug for Ford, Hyundai, Mazda, Mitsubishi, Nissan, Subaru vehicles
 1 plug for Honda vehicles
 1 plug for Mazda and Suzuki vehicles
 1 plug for Nissan vehicles
 1 proposition of the plug plug substant plug

- 1 brake bleeding adapter plug for European vehicles



Tyre bead seater

- Secondary handle with push-button operation helps keep hold of tool during use
- Pressure relief valve
- · Gauge with graduated scale
- Plastic inlet preventing rim damage



Tyre bead seater

• Tank capacity: 18 I • Operating pressure: 3-8 bar

Maximum tank pressure: 16 bar



Truck tyre bead seater

₩ Ø 290x560 mm

₩ Ø 290x440 mm

- Tyre bead seater for trucks, buses, agricultural vehicles and earth-moving machinery
- Tank capacity: 36 I
- Operating pressure: 3-8 bar
- Maximum tank pressure: 16 bar





1950GPP £ 262.00 £ 154.00

Portable tyre inflator with automatic and manual charging, with inflating gun



Technical data:

- Tank capacity: 10 I
- Max. tank pressure: 16 bar (232 psi)
- Tank pressure gauge, Ø 50 mm: 0÷16 bar (232 psi)
- Operating pressure gauge: 0÷16 bar (232 psi)
 Inflating hose length: 1550 mm



Tyre inflator

- · Shockproof rubber coated body
- Metal operating lever
- Operating pressure:
 0,5÷12 bar, 7÷174 psi
 Pipe length: 58 cm
- 360° hose rotation
- 1/4" air inlet

4 019490018

£ 107.50

£ 46.00

- Pressure release feature
- · Pressure measurement feature



Digital tyre inflator

- · 4 units of measurement, bar/psi/kpa/kgf
 • Backlit LCD display
- Resolution: 0.05 bar
- · Self-power off after 1.5 minutes







962

Tyre levers

	L mm	A mm		£
962 500	500	27	009620005	£37.00 £ 21.00
962 600	600	27	009620006	£48.00 £ 27.00

£291.00 £ 167.00 972/C10

Removal kit for damaged wheel nuts





• For easily transporting tyres

up to 980 mm in diameter

• The sturdy frame allows tyres to be handled without bearing the weight physically

• Can be used as a top by locking

position horizontally
• 2 castors Ø 260 mm

• 2 castors Ø 125 mm

• Maximum transportable height: 1.60 m

Maximum carrying capacity: 200 kg
Forks can be adjusted in 2 positions:

first position: maximum opening 880 mm

- second position: maximum opening 980 mm



3 009720004

Removal kit for anti-theft bolts with free rings, for BMW and Mini cars





£ 230.50 £ 133.00

















Impact socket with polymeric insert

for Mercedes wheel screw

- Suitable for the following Mercedes models:
 Classe C e GLK (W204)
 Classe E (W211, W212, W207)
 Classe SLK (W172)
- Classe ML (W164, W166)
- Classe CL (W216) Classe S (W221, W222)



1/2



⊕ mm	L mm
17	85





Tyre valve screwdriver

Automatic valve retention.

L mm	L1 mm
78	18







Required when nut caps are damaged by impact wrenches





£19.00 £ 12.00















989 **3** 009890001

£48.00 £ 27.00

Wheel balancing weight tool




£19.00 *720RNG* £ 12.00 **007200634**

Impact socket for Jeep Renegade wheel nuts with aluminium damaged caps

Required when nut caps are damaged by impact wrenches.



1/2 " (







Manual jack and positioner for truck wheels

This jack, which has a maximum carrying capacity of 136 kg, has been designed to make it easier to lift and handle large tyres.

The frame with increased thickness and the reinforcements applied to the welding areas provide this device with remarkable sturdiness and firmness.

Features:

- · Oscillation rollers for significantly improved wheel alignment with hub pins


 • Dual wheels for easy tyre handling
- Ergonomic rubber-coated handle, for a firm, safe hold





£ 145.00 £ 79.00

Homokinetic joint puller





£333.00 £ 158.00

Lever for removing wishbone heads and shock absorbers from pillar

One operator can position lever effortlessly and proceed with disassembly





£ 237.00 £ 138.00

⚠Max 20 Nm

Pneumatic assembly tool for silicone axle shaft boots

• 8 spreader arms

Maximum arm spreading: 145 mm

▲Max 20 Nm







1530/C5

4 015300300

Wheel hub and bearing pulling kit, 3, 4, 5 holes

Kit contents:

- 1 universal flange (96÷138 mm)
- 1 hydraulic screw (12 t)
- 1 hammer face (2.8 kg), required for hubs without central fixing bolts





1550U

£ 2,960.00 £ 1.589.00

Pneumatic shock absorber removal tool for cars, SUVs and commercial vehicles



- Maximum thrust: 2 tons (10 bars) 1.6 tons (8 bars) -1.2 tons (6 bars)
- Spring compression stroke: 335 mmUpper universal hold system that allows all left/right-hand spring diameters to be compressed with one upper adaptable plate
- · Active safety system on spring: safety hook and 3 locking valves allow spring to be properly positioned/seated, maintaining such position throughout compression If spring is not positioned properly.
- system will stop machine.
 Protective "Full Body" Grille: provides maximum safety and working area coverage
- Control Lever operation: increased accuracy and sensitivity during compression stage
- · Working position: working height on rear fork raised up to 875 mm
- Supplied with 2 lower forks for diameters 78-205 mm



1552/C9 **3** 015520020

£ 124.00 £ 71.00

Kit for spreading shock absorber, wishbone and steering wheel joints apart

Working with single or double retractor head also makes it possible to work on double joints, e.g. from VAG group.



1556/1A **3** 015560101

£ 233.00 £ 121.00

Compressor for shock absorber springs

L Min÷Max= 65÷320 mm





1569/SE

-- 015690016

£ 245.50 £ 133.00

Assortment of tools for removing and installing rear axle silent blocks, driving shaft oil seals and wheel bearings

Bushings can be used both on vehicle and on hydraulic press



€ 425x365x100 mm 1 13 kg





£399.00 £ 228.00

Extension bodywork support

- 4 swivel castors, 2 with brakesPantograph can be extended up to 1400 mm
- Vertically adjustable up to 1315 mmPosition locking
- Contact surface covered with removable rubber











L mm	H mm	P mm
215÷1400	780÷1315	890

1364SV

= 013640002

Bodywork support with central tray

- Contact surface covered in polyethylene
 Tray dimensions: 340x845x40 mm
 Foldable









£227.00 £ 130.00

Revolving bodywork support

- Particularly suitable for bonnets, wings and doors
- Fitted with 4 castors 2 steering with brakes
- Can be rotated up to 180°









L mm	H mm	P mm
1100	1300	680



1052

Adjustable self-locking pliers, concave jaws

	L	ø Max mm	å g	(==) HERRE B	£
1052/140	140	22	175	010520014	£26.50 £ 15.00
1052/190	190	36	360	010520019	£29.50 £ 17.00
1052/240	240	42	590	010520024	£32.00 £ 19.00
1052/300	300	55	900	010520030	£52.50 £ 31.00



1068

3 010680000

£ 68.00

Adjustable self-locking pliers with hammer face

The self-locking pliers with 1 kg sliding hammer face is ideal for pulling stud bolts, broken screws and sheets, especially in the car repair industry.











£ 243.00

Wheel lifter

- . Maximum lifting capacity: 550 kg
- 4 pivoting rollers
 Roller width: 200 mm
- For wheels up to 240 mm in width

IDEAL FOR:


- LOADING DAMAGED CARS ONTO TOW TRUCKS
- CAR REPAIR GARAGES
- MOVING CARS IN SHOWROOMS





£ 120.50 £ 65.00

Double suction lifter



1367/K10

= 013670200

Kit of punches for installing parking sensors

Sizes Kit contents:

17 - 18 - 18,2 - 19 - 20 - 22,5 - 24 - 26 - 26,7 - 32 mm

PERPENDICULAR. **BURR-FREE HOLES**







Trim pin remover







1365/K13 **3** 013650013 Oil pressure pump, 10 t, and bodywork accessories kit in handy trolley Kit contents:

- Oil pressure pump, 10 t, with 1.5-m-long hose, 1/2" coupling
- Piston 205 mm
- Wing opening pliers; capacity: 500 kg
 Baseplate, 150x90 mm
 L-shaped base, 50x50 mm

- 4-point punch
- Round, knurled punch, Ø 50 mm
- Wedge-shaped punch, 43 mm
- 170-mm-long extension300-mm-long extension
- 400-mm-long extension530-mm-long extension
- Rubber head
- Male-to-male coupling for installing accessories



3 013610030


£ 302.00 £ 172.00

Kit of 8 levers for bodywork dent pullers

Kit contents:

- Round ball head rod, Ø 31 mm, length 110 cm
 Tip rod, length 62 cm

- Whale tail tip rod, length 112 cm
 Hook tip rod, length 27 cm
 Flat round head rod, length 50 cm
 Round ball head rod, Ø 19 mm, length 52 cm
- Whale tail head rod, length 27 cm
- · Round whale tail head rod, length, 28 cm
- Fabric bag with handles

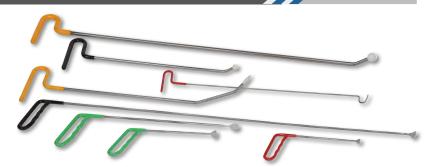



1368

--- 013680001

Plastic repair kit

- Power supply: 220÷240 V with Schuko socket
 • Heat gun cable length: 3.5 m
- Power supply cable length: 1.35 m
 2 power adjustments: 35-75 W
- · Heat gun with brass terminals, 2 staple insertion angles: 0°-90°
- Input protection: thermal circuit breaker
- Output protection: 10 A fuse
- Metal gun pocket



£420.00 £ 242.00

ALLOWS CRACKED AND BROKEN PLASTIC PARTS TO BE QUICKLY FIXED



£ 1,104.00

1366SH

3660400

Multifunction bodywork spotter

• Microprocessor for managing welding parameters

Contact and manual welding cycle start

Automatic spot welding time setting function

 Supplied with quick coupling gun and 2.2-m-long ground cable

Accessory kit contents:

- extractor hammer
- three-pointed washer head
- 10 three-pointed washers
- carbon electrode
- squashing electrode

Power supply	230V
50% power	2.5 KVA
Power peak	13 KVA
Amp output	2850 (2%) A
Max. Amp output	3200 A













£ 17.00

Reusable seat, steering wheel and gear knob protector





Car front protector



1479/B27 **=** 014790407

£78.50 £ 43.00

Kit of 27 nylon tools for removing pins and working on plastics and seals, hangable





£ 256.00 £ 139.00



3 018700220

Solid and fluid vacuum cleaner, 20 I, stainless steel drum

- Single-stage by-pass motorVoltage: 220/240 V
- Frequency: 50/60 HzMax. power: 1200 W
- Airflow rate: 58 l/sec.
- Max. suction pressure: 190 mbar
- Max. drum capacity: 20 I, made of stainless steel
- Acoustic emissions: <70 dB(A)
- Cable length: 5 m



Standard accessories Ø 36 mm

- 1 corrugated hose with ergonomic handle and vent
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle
- 1 paper bag

Filtering systems

- 1 surface air filter cartridge 1900 cm² - 12 μm nom. • 1 anti-foam filter PPI 45/PPI 30

1875LT

= 018750000

£ 563.00 £ 332.00

Injection/extraction carpet/upholstery cleaner

Ideal for deeply cleaning textile surfaces. It dispenses pressure sprayed detergent and sucks it up with dirt, leaving surfaces almost dry.



- Voltage: 230/240 V
- Frequency: 50/60 Hz
- Max. power: 1100 W
- Airflow rate: 58 l/sec.
- Max. drum capacity: 20 I
- · Max. detergent tank capacity: 3 I
- Max. pump pressure: 7 b

Supplied accessories:

- 1 hose complete with ergonomic handle
- 1 dispenser unit
- 2 hard extensions
- 1 small spray extraction nozzle
- 1 big spray extraction nozzle
- 6 power cord locknuts ar
- Max. suction pressure: 21 kPa
 Pump power: 48 W

1874 50

3 018740050

£845.00 £ 467.00

Solid and fluid vacuum cleaner, 50 l. stainless steel drum

- Two-stage by-pass motor
 Voltage: 220/240 V
- Frequency: 50/60 Hz Max. power: 1350 W
- Airflow rate: 55 l/sec.
- Max. suction power: 240 mbar
- Max. drum capacity: 50 I, made of stainless steel
- Acoustic emissions: <63 dB(A)
- · Cable length: 6 m
- Trolley for accessories

FILTERING SYSTEMS

- 1 filter paper bag
- 1 surface filter cartridge 5200 cm², 12 um nom.
- 1 anti-foam filter PPI 45/PPI 30

STANDARD ACCESSORIES, Ø 45 mm

- 1 corrugated hose
- with ergonomic handle
- 2 stainless steel extension tubes
- 1 industrial brush frame
- 1 industrial section for carpets
- 1 industrial section with fluid collection hoses
- 1 flat nozzle



HIGHLY EFFECTIVE FOR CAR SEATS AND INTERIORS













£ 26.50 £ 16.00

Hand pressure pump with 5 I tank

- Stainless steel nozzle
- · Locking lever for continuous jet
- Adjustable nozzle with straight jet and mist spray
- Shoulder strap for ease of transport
- Nozzle hook-up handle
- 1.2-m-long hose
- Not for use with hydrocarbons







3003PRO/K

£ 425.00 £ 186.00

Creeper made from shockproof plastic material, wall-mounted plastic support

3003PR0

Creeper made of shockproof plastic

- Ergonomic head cushion
- Soft back protector
- 2 178 mm double bearing castors for trouble-free use on uneven surfaces and pipes/cables
- 1 swivel castor
- Double height adjustment from the ground: 38 or 76 mm
 2 portable LED lamps (250 lumens)
- 2 portable LED lamps (250 lumens) with fixing magnets

3003PRO/SP

Wall-mounted plastic support for creeper 3003PRO



1898/M

3 018980930

£ 9.00

Pressure sprayer with 1,5 I tank

- Adjustable nozzle with straight jet and mist spray
- Graduated scale 0.5 I 1 I 1.5 I
- · Locking lever for continuous jet
- Not for use with hydrocarbons







1898/C

£243:00 £ 149.00

Wheeled sprayer, 25 I

- Dual function: spraying and foaming
- Painted steel tank
- Stainless steel nozzle
- Anti-twisting hose
- Tank pressure gauge
- Tank level indicator

Technical data:

- Tank capacity: 25
- Supply hose length: 5 m
- Maximum working pressure: 4-5 bar
- Nozzle length: 0.65 m
- Maximum tank pressure: 8 bar





Heavy duty swivel creeper seat with tray

- · Round swivel seat
- Height can be adjusted through a gas piston mechanism (410-530 mm)
- 2 tote/tool trays, one being vertically adjustable
- 5 pivoting castors



3002

30020001

£113.50 £ 65.00

Creeper and seat

- Steel frame
- PVC lining with upholstery
- Easily convertible into a creeper or a seat









Kit of pin punches and plate for presses 3028

Sizes of pin punches:
• Ø10X90mm

- Ø12X90mm
- Ø16X90mm
- Ø18X115mm
- Ø20X115mm
- Ø22X115mm
- Ø25X140mm
- Ø30X140mm



3027PR/N **030270410**

Press supporting tool for removal/insertion of hubs, bearings and silent blocks

Universal device allowing user to install/remove hubs, bearings and silent blocks into/from their housings by operating via a press, through a supporting base and dedicated accessories. Designed to adapt to irregular geometric shapes of hubs/king pins on which operator must work.Can be used with presses 3027N and 3028.

Technical data:

- Working range: min. 135 mm max. 150 mm
- Dimensions; 250x202 mm
- Maximum load bearing capacity: 20 t











£1,058.00

£4,390.00

CE

£ 607.00









Pit and under bridge jack with screw adjustment

MAXIMUM CARRYING CAPACITY: 350 kg

H min-Max mm Ø mm 1350÷2030 300







	C max kg	H min÷max mm		£
3011T 2	2000	174÷369	030110020	£89.00 £ 47.00
3011T 3,5	3000	170÷366	030110035	£99.50 £ 52.00
3011T 5	6000	203÷467	030110050	£111.50 £ 61.00
3011T 10	10000	220÷484	030110100	£167.50 £ 89.00
3011T 15	15000	230÷497	030110150	£205.00 £ 112.00
3011T 20	20000	245÷521	030110200	£258:00 £ 149.00
3011T 32	32000	260÷420	030110320	£267:00 £ 158.00
3011T 50	50000	280÷450	030110500	£309.00 £ 186.00

3010T

Jack stands, pair

	C max kg	H min÷max mm	===	£
3010T 2	2000	280÷425	030100002	£99.50 £ 55.00
3010T 3	3000	285÷430	030100003	£118:00 £ 65.00
3010T 6	6000	400÷580	030100006	£171.50 £ 93.00
3010T 10	10000	471÷735	030100010	£296.00 £ 161.00



3010T 2 3010T 3 3010T 6



3010H

Heavy-duty jack

	C max kg	H min÷max mm	L x L1 mm	å kg	STATE OF THE PARTY	£
3010H631-T15	15,000	445÷631	300x300	22,5	030100150	£320.00 £ 183.00
3010H1077-T15	15,000	645÷1077	300x300	30	030100165	£401.00 £ 225.00



3010V

Heavy-duty jack stands, screw adjustable

	C max kg	H min÷max mm	L / L1 mm		£
3010V600-T20	20,000	410÷600	330x330	030100200	£ 466:00 £ 259.00
3010V1090-T20	20,000	665÷1090	460x460	030100220	£592:00 £ 336.00












1450x1550x390x960 mm



Dimensions (LxHxPxP1)

1375x1540x370x942 mm



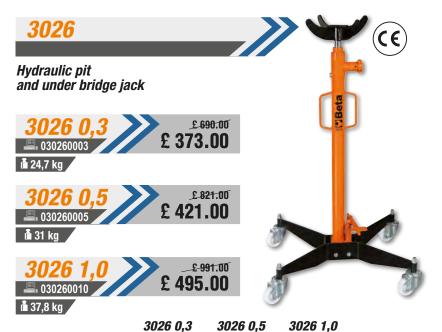

500 kg

1140÷1990 mm

1000 kg

1140÷1990 mm

3026/SP £ 326.00

Universal transmission support

- Allows one operator to disassemble and reassemble any transmissions of cars, commercial vehicles and off-roaders quickly and safely
- Suitable for stands with diameter: 25-30-35-45 mm
- Max. capacity: 150 kg
- Height: 250 mm







Robur

Maximum capacity
Pedal pump
Max÷min height

Load limiting valve

Lifting web slings, two layers with reinforced eyes high-tenacity polyester (PES) helt EN 1492-1

300 kg

1120÷1970 mm







Bag with set of 4 ratchet tie-downs 8181, 6 m high-tenacity polyester belt, single hooks




Bag with set of 2 ratchet tie-downs 8182, 8.5 m high-tenacity polyester belt, single hooks







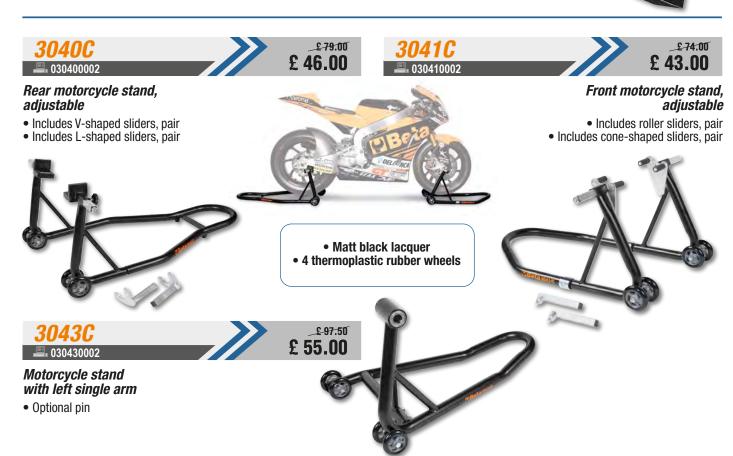

2002/B27 SBK

3 020020927

Travelling kit for motorbikers

Quantity/Description Beta N. Double open end wrenches 6x7-8x9-10x11-12x13-14x15-55 16x17-18x19-20x22 mm Offset hexagon key wrenches
O 1,5-2-2,5-3-4-5-6-8-10 mm
Evox screwdrivers for slotted head screws

3,5x100-5,5x150-6,5x150 mm
Evox screwdrivers for cross head Phillips® screws 96BPC/SC9 1201E 1202E ◆ 4,5x80 - 6x100 mm Multipurpose tool complete with bits and sheath LED inspection torch 133 mm 1778MT 1833 XS/2 Instant glue for structural joints 5 gr PVC electrical tape sp.0,15 mm / 19 mm x 25 m Nylon cable ties 4,8x300 mm 9851 BMESB1925NE BMN3048 Roll-up tool wallet made of durable polyester, empty 2002/BV42



£ 290.00



BICYCLE TOOLS






£3,530.00 1,869.00

CE

E-Bike lift

- Maximum height of central movement support: 135 cm
- · Built-in wheel truing stand
- Innovative thru-axle locking systemSupplied with adapter sockets for most forks
- Supplied with fork connection adapter without thru-axle
- Fully foldable and transportable

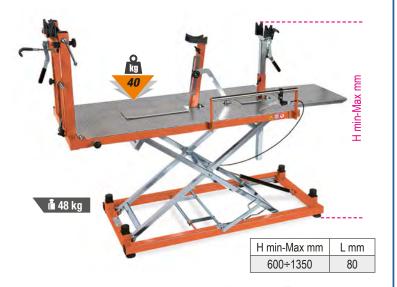





Workshop single-sided electric clamp for bicycle maintenance


- Clamp that can be rotated up to 180° and rubber jaws
- Load capacity: 35 kg
- Adjustable height
- · Can be fixed to floor, or with optional stand





Self-supporting stand

For single-sided clamp item 3919MME



605BC/15

Click-type torque wrench with reversible ratchet, for right-hand tightening, compact, made from aluminium, torque accuracy: ± 4%

The smallest torque wrench of Beta's range: compact and easy to use,

it provides an ideal combination of convenience and simplicity within reach.



COMPACT: NO MORE THAN 17.5 cm

UNI EN ISO 6789



117.00



Nm	kgfm	lbf.fn		L (mm)	لسيا
3÷15	0,3÷1,5	26÷133	1/4"	175	0,1



3 019270008

£421.00 £ 186.00

in plastic case

Reversible impact wrench, supplied with 3 impact sockets, £ 550.00

£ 205.00


Reversible impact wrench

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever

Internal hose size (Ø)

Mean air consumption

• Three power adjustable screwing positions









10

290

Reversible impact wrench, made from composite material

· Double hammer impulse device

Reverse control knob

• Three power adjustable screwing positions

mm

I/min

Exhaust through handle

· Vibration-damping handle



140

I/min



 (ϵ)

019270006

£ 220.00 £ 121.00

Reversible impact wrench, made from composite material

• Double hammer impulse device

· Lightweight and well-balanced, for enhanced ease of use

Reverse control lever

• Three power adjustable screwing positions

· Exhaust through handle

Vibration-damping handle



Mean air consumption





NEW

THAT DOES NOT REQUIRE LUBRICATION

The impact wrench, 19270LS, fully designed, developed and ENGINEERED BY BETA UTENSILI, relies on the OIL-LESS system, a brand-new innovation in the pneumatic tool industry: it allows the impact wrench to operate without having to be periodically lubricated with oil, thus ensuring increased durability and high performance.

The painstakingly studied assembly, micrometer alignment of the interior parts and use of innovative first-rate materials result in a reduced number of failures, for lubrication-free lifetime use.









PATENT PENDING

The OIL-LESS impact wrench stands out for high torque transmission – that is, 1750 Nm –, which makes it ideal for any application.

- No lubrication required
- Double hammer impulse device











Free speed	8.000 rpm
Max. torque	1.750 Nm
Bolt capacity	CI 8.8 M24 36 mm
Bolt capacity	CI 12.9 M20 ■ 30 mm
Air inlet	1/4" GAS
Operating pressure	6,2 bar
Internal hose size (Ø)	10 mm
Mean air consumption	198 I/min



4 TIMES THE USEFUL LIFE OF A TRADITIONAL IMPACT WRENCH

Based on these hallmarks, the OIL-LESS impact wrench can boast an excellent cost/benefit ratio, thus translating into savings in the long run.



Compact reversible impact wrench

- Single hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

1/2

£ 262.00

£ 139.00

ULTRA COMPACT

Free speed	rpm	10.000
Impulse device		Single hammer
Max. torque	Nm	770
Bolt capacity	Cl 8.8	M22●34 mm
Bolt capacity	CI 12.9	M18●27 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	I/min	122



£323.00 £ 167.00

Assortment of 1 compact reversible impact wrench and 5 impact sockets, in plastic case



○ **720** 17-19-21-22-24 mm




--- 019270050

Compact reversible impact wrench

- Single hammer impulse deviceAluminium motor housing with composite handle
- One-handed reverse control
 Three power adjustable screwing positions
- Exhaust through handle
- Head motor with direct rotation transmission to output drive, resulting in improved body balancing and increased handiness



Free speed	rpm	8.500
Max. torque	Nm	325
Bolt capacity	CI 8.8	M16●24 mm
Bolt capacity	CI 12.9	M14●21 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	113




£ 559.00

1928XM

Compact reversible impact wrench

- Double hammer impulse device
- Amazingly compact and powerfulOne-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle

ULTRA COMPACT AND POWERFUL 1600 Nm





9 Bala

£1,113.00

£ 513.00

1928DA

3 019280022

£809.00 £ 373.00

Reversible impact wrench

- Double hammer impulse device
- · Sturdy and compact; high torque
- Reversible lever
- Three power adjustable positions
- Exhaust through handle
- Slip-proof ergonomic handle



34"

Reversible impact wrench, made from composite material



- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever

1928P

3. 019280006

- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

2100 Nm



240 mm	D mm		□ Beta
Free speed	rpm	5.000	
Impulse device		Double hammer	3 ,7 kg ✓
Max. torque	Nm	2100	12 0,1 kg
D-#			
Bolt capacity	CI 8.8	M30 ● 46 mm	
	Cl 8.8 Cl 12.9	M30●46 mm M27●41 mm	
Bolt capacity	-		
Bolt capacity	CI 12.9	M27 ● 41 mm 3/8" 6,2	
Bolt capacity Bolt capacity Air inlet Operating pressure Internal hose size (Ø) Mean air consumption	CI 12.9 GAS	M27 ● 41 mm 3/8"	

217 mm 5.000 Free speed rpm Impulse device Double hammer i 4,3 kg ✓ Nm Max. torque 1695 M30-46 mm Bolt capacity CI 8.8 Bolt capacity CI 12.9 M27●41 mm Air inlet GAS Operating pressure bar 6,2 Internal hose size (Ø) mm

210

Mean air consumption

4 019300037

Reversible impact wrench

- Double hammer impulse device
- 8" long anvil
- Auxiliary handleReversible lever
- Three power adjustable screwing positions
- Lower exhaust

£1,270.00 £ 688.00



CE

1 "



£1,205.00

£ 654.00



1*930PA* **4** 019300032

Reversible impact wrench

- Double hammer impulse device
- Auxiliary handle
- Reversible lever
- Three power adjustable screwing/unscrewing positions
 • Exhaust through handle

Free speed	rpm	3.500
Impulse device		Double hammer
Max. torque	Nm	2445
Bolt capacity	Cl 8.8	M36●55 mm
Bolt capacity	CI 12.9	M30●46 mm
Air inlet	GAS	1/2"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	13
Mean air consumption	l/min	350



PBG(E)



720ME/C8

£ 144.50 £83.00

12"0

Set of 8 impact socket drivers for hexagon screws, in metal case

O 5-6-8-10-12-14-17-19 mm



720TX/C6

3 007200483

£118.00 £ 69.00

Set of 6 impact socket drivers for Torx® head screws, in metal case

1/2 "()

O T30-T40-T45-T50-T55-T60



3 007200904

£395.00 £ 196.00

Set of 24 impact sockets, 1/2" female drive, phosphatized, in metal case

12"0



17-19-21 mm

007200912

£ 184.50 £ 102.00

Set of 12 impact sockets, in metal case

12"0

O 10-11-12-13-14-17-19-22-24-27-30-32 mm



720LC

£332.00 £ 186.00

Set of 10 impact sockets, in metal case

34"(

○ 17-19-22-24-27-30-32-36-41-46 mm



Reversible air impact ratchets

- Double rocking dog" impulse device
- Easy tightening: The impact mechanism system eliminates wrist twisting at end of screwing and shortens operating time
- Compact and powerful: maximum torque is significantly higher than maximum torque as achieved with a conventional ratchet
- Ergonomic rubber handle



Free speed	rpm	700
Maximum torque	Nm	68
Bolt capacity	Cl 8.8	M10●16 mm
Bolt capacity	CI 12.9	M8 ● 13 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	88



Free speed	rpm	600	
Maximum torque	Nm	136	
Bolt capacity	Cl 8.8	M12●18 mm	
Bolt capacity	CI 12.9	M10●16 mm	
Air inlet	GAS	1/4"	
Operating pressure	bar	6,2	
Internal hose size (Ø)	mm	10	
Mean air consumption	I/min	113	

HIGH TORQUE **WITHOUT** AFFECTING WRIST

£ 191.00 Roto-orbital palm sander, å 860 g lubrication free, made from composite material No lubrication required 100 mm · Extremely compact and easy to handle Orbit diameter: 5 mm Ø150 mm 6-hole Velcro pad 230 mm Continuous motor speed adjustment 12.000 Free speed rpm · Nonslip, soft material handle 0,18 Power Designed for connection to suction Pad size mm 150 systems with swivel fittings Spindle thread 5/16"-24 Revolving exhaust Air inlet GAS 1/4" Operating pressure bar 6.2 Orbit Ø 5 mm Internal hose size (Ø) mm 10 Mean air consumption I/min 170



Air saw

Powerful and handy


· Designed for cutting bodies, exhaust pipes and silencers, aluminium and plastic

I/min

· Complete with rubber handle, PVC exhaust pipe and air-feeding hose

Rear exhaust

Mean air consumption





£ 156.00 £ 89.00

Professional paint spray gun

• Die-cast aluminium body plated with black chemical nickel

Nylon cup with drip-catching device, 3/8M BSP thread

Body thread: 1/4" BSP cylindrical gas thread
Pressure and airflow regulator

Jet regulator from round to fan spray pattern

Paint quantity regulator

Supplied with service spanner for maintenance operations

	Ø mm	ETT.
1952 1,2	1,2	019520012
1952 1,5	1,5	019520015
1952 1,8	1,8	019520018
1952 2,0	2,0	019520020






RENEGADE

NEW

THE NEW SAFETY FOOTWEAR RANGE

Renegade has been designed to provide uncompromising safety and style.

The range, which comprises 6 models in unique colours and materials, perfectly suits those interested in standing out in any working environment. Renegade relies on a design inspired by latest generation sports shoes, superior cushioning and remarkable support to provide comfort all day long.

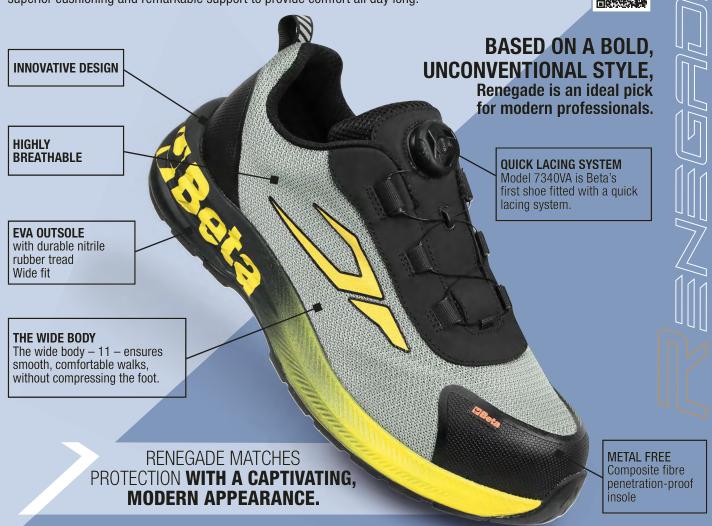



7340VA



£ 160.00 £ 91.00

RENEGADE mesh fabric shoe, highly breathable, with ATOP lacing

å 495 g **S1PS FO SR HRO**

Sizes available: from 37 to 48 III from 073400**537** to 073400**548**









7340G



RENEGADE mesh fabric shoe, highly breathable, with traditional lacing



i 495 g ∠ S1PS FO SR HRO

Sizes available: from 37 to 48 **I** from 073400**637** to 073400**648**

7341Y

£ 136.50 76.00

RENEGADE woven fabric shoe, hard-wearing and breathable, yellow details



ii 495 g S1PS FO SR HRO

Sizes available: from 37 to 48 ## from 073410**637** to 073410**648** 7341V

£ 136.50 £ 76.00

RENEGADE woven fabric, hard-wearing and breathable, green details



i 495 g S1PS FO SR HRO

Sizes available: from 37 to 48 **I** from 073410**537** to 073410**548**

7342N

£ 145.00 £82.00

RENEGADE microfibre shoe, water-repellent



₫ 500 g

Sizes available: from 37 to 48 # from 073420**537** to 073420**548**

7343N

RENEGADE microfibre ankle shoe, water-repellent







Sizes available: from 37 to 48 **I** from 073430**537** to 073430**548**

£ 158.00 £ 89.00




Fit**Evolution**

Seven uniquely designed models, available in several colours and materials, ranging from mesh to microfibre, to satisfy the most demanding users' requirements.



After several years of painstaking studying and designing, we developed the patented system, **FIT 4 YOU**. This state-of-the-art penetration-proof insole pressing process allows three different **ETPU** inserts – each with different densities – to be combined, to provide three levels of comfort, thus satisfying every user's requirements.

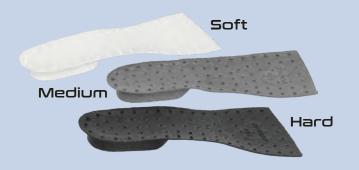



The patented system, FIT 4 YOU, is based on 3 provided ETPU inserts, varying in density and colour,to allow the user to customize the shoe according to weight, height and personal usage requirements.



Composite toe cap
Composite fibre penetration-proof insole
3 ETPU inserts, with 3 different densities,

• 3 ETPU Inserts, with 3 different densities, for a customized shoe

Heel stability support and traditional lacing.
Dual-density polyurethane outsole



FitEvolution woven fabric shoe, hard-wearing and highly breathable





Sizes available: from 37 to 48

____ from 072720137 to 072720148



7270Y

£138.50 £ 78.00

FitEvolution mesh fabric shoe, highly breathable



i 550 g



Sizes available: from 37 to 48From 072700137 to 072700148

7273G

£142.00 £ 81.00

FitEvolution nubuck shoe, water-repellent



6 590 g S3 S FO SR ESD



Sizes available: from 37 to 48

____ from 072730137 to 072730148

7271V

£138.50 £ 78.00

FitEvolution suede shoe, perforated



₫ 550 g



Sizes available: from **37** to **48**A da 072710**137** to 072710**148**

7274G

£146.50 £83.00

FitEvolution nubuck ankle shoe, water-repellent



å 650 g

S3 S FO SR ESD



Sizes available: from **37** to **48**From 072740**237** to 072740**248**

7275N

£142.00 **£ 81.00**

FitEvolution *microfibre shoe,* water-repellent





Sizes available: from 37 to 48 in from 072750237 to 072750248



Beta O-Gravity

EXTREMELY LIGHT

LESS THAN 500 G approximate weight for size 42







£127.50

£72.00



0-Gravity mesh fabric shoe,

· Stretch slip-on collar

highly breathable, with TPU inserts

£123.00 £70.00

£123.00 **7352G**

O-Gravity ultralightweight mesh fabric shoe, highly breathable

Traditional lacing



ii 450 g

S1P HRO SRC ESD



Sizes available: from 38 to 48 From 073520338 to 073520348

1 450 g S1P HRO SRC

ACTIVE

220NA

(CE)

7317NA

£ 41.00

Suede shoe, perforated, with microfibre reinforcement in heel area



 7320NA

£ 42.00

Nubuck shoe, water-repellent, with anti-abrasion reinforcement in toe cap area



Sizes available: from 35 to 48 if from 073200535 to 073200548

BASIC

S1P SRC

NEW

NEW LOOK!

EN ISO 20345 2011



7241NC

>>

£42.50 £ **24.00** 7246NB

S3 SRC

>>>

23.00

BASIC leather safety shoe, water-repellent



Sizes available: from 35 to 48 from 072411635 o 072411648

BASIC suede shoe, perforated



Sizes available: from 35 to 48 in from 072461635 o 072461648

S3 FO SR





HIGH PERFORMANCE

7569NG

3-in-1 jacket, with outer jacket and removable inner vest:

- Outer shell in 100% polyester with waterproof, windproof, breathable TPU membrane (resistance to water columns up to 8,000 mm - breathability 3,000 mvp)
 • Inner vest in 100% nylon
- and 100% polyester **padding**, 100 g/m², with detachable hood
- Black with anthracite grey inserts



halandad	XS	S	M	L	XL	2XL	3XL
	075690 000	075690 001	075690 002	075690 003	075690 004	075690 005	075690 006

7563N

Grid microfleece sweater, short-zipped

- 100% polyester, 180 g/m², Stretch sleeve bottoms
- and waist
- Black with anthracite grey inserts





hadalalala	XS	S	M	L	XL	2XL	3XL
	075630 000	075630 001	075630 002	075630 003	075630 004	075630 005	075630 006

7560NG

£76.50 £ 43.00

4WayStretch work trousers, multipocket style

- 90% polyester, 10% spandex, 240 g/m²
- Knee pad pockets, reinforced pockets and leg bottoms, stretch waist

 Black with anthracite grey inserts
- Slim fit











hadaadaad	XS 46	
围	075600 000	07

M | 50

L | 52 XL | 54

75600**001** 075600**002** 075600**003** 075600**004** 075600**005** 075600**006**







THE CLOTHING LINE **DESIGNED TO MAKE** THE MOST OF THE OUTSTANDING PROPERTIES OF GRAPHENE.





7647GG

£70.00 £ 37.50



Sleeveless softshell work jacket

- Outer fabric: 96% 100D polyester, 4% spandex, 280 g/m²
 Inner fabric: 100% polyester + graphene
 Grey/Black

- · Temperature-regulating, water-repellent and breathable





hinhahahah	XS	S	M	L	XL	2XL	3XL
	076470 010	076470 011	076470 012	076470 013	076470 014	076470 015	076470 016

7644GG

£62.50 £ 35.50







- 60% cotton, 40% polyester with graphene, 280 g/m²
- Temperature-regulating, breathable, easy care





Linkalakala	XS	S	M	L	XL	2XL	3XL
	076440 010	076440 011	076440 012	076440 013	076440 014	076440 015	076440 016

£87.50 £ 47.00





Stretch work trousers, multipocket style, made from graphene

- 90% nylon with graphene, 10% spandex, 250 g/m², reinforced with 600D Oxford polyester, grey


 Temperature-regulating, water-repellent
- and quick drying
- Slim fit







7272V **FitEvolution** Œ**111**82





£78.50

7642G

£ 29.50 £ 17.00

Crew-neck sweatshirt, 240 g/m², 60% cotton, 40% polyester, melange grey, black inserts



076420**000** 076420**001** 076420**002** 076420**003** 076420**004** 076420**005** 076420**006**

7637G £ 42.00

Technical sweatshirt, long-zipped, 250 g/m², with hood fleece, 100% polyester, with inserts made from softshell fabric 100D, with bound fleece, 270 g/m²





£ 97.50 £ 55.00

Work overalls, 100% cotton, grey

• 97% cotton, 3% stretch fabric, 220 g/m²



nanana.	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58
	079350 400	079350 401	079350 402	079350 403	079350 404	079350 405	079350 406

7930MG

£ 55.50 £ 31.00

Work trousers, multipocket style, 100% cotton, grey

• 97% cotton, 3% stretch fabric, 220 g/m²

Elastic waistband








adadad	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58
	079300 400	079300 401	079300 402	079300 403	079300 404	079300 405	079300 406

£11.30 £ 6.50





Winter cap with LED light, rechargeable

- 100% acrylic Ribbed cuffed cap
- Beta fabric tag on front
- · Removable, rechargeable LED light
- LED light with three brightness settings, up to 60 lumens





LINEA Betaensy

- 65% polyester, 35% cotton
 T/C ripstop insets and knee pads
 Strap "Oxford" snap loop



Work trousers in T/C canvas, 260 g



Work trousers in T/C twill, 180 q

	[ududud	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58	4XL 60	5XL 62
7860B		078600 700	078600 701	078600 702	078600 703	078600 704	078600 705	078600 706	078600 707	078600 708
7860G		078600 800	078600 801	078600 802	078600 803	078600 804	078600 805	078600 806	078600 807	078600 808
7900G		079000 800	079000 801	079000 802	079000 803	079000 804	079000 805	079000 806	079000 807	





€ 85.50 £ 47.00

Work overalls in T/C canvas, 260 g

LIGHT	
7865	£ 44.00

Work overalls, lightweight in T/C twill 180 g

	Lidudidad	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58	4XL 60	5XL 62
7865B		078650 700	078650 701	078650 702	078650 703	078650 704	078650 705	078650 706	078650 707	078650 708
7865G		078650 800	078650 801	078650 802	078650 803	078650 804	078650 805	078650 806	078650 807	078650 808
7905G		079050 800	079050 801	079050 802	079050 803	079050 804	079050 805	079050 806	079050 807	



Work bib and brace overalls in T/C canvas, 260 g



Work bib and brace overalls, lightweight in T/C twill 180 q

	harlandan.	XS 46	S 48	M 50	L 52	XL 54	2XL 56	3XL 58	4XL 60	5XL 62
7863G		078630 800	078630 801	078630 802	078630 803	078630 804	078630 805	078630 806	078630 807	07863 0 808
7903G		079030 800	079030 801	079030 802	079030 803	079030 804	079030 805	079030 806	079030 807	



£38.00 £ 22.00

Technical underwear set technical undershirt, long-sleeved + technical underpants

Linkshilata	XS-S	M-L	XL-XXL
	079960000	079960002	079960004



- 92% polyester, 8% spandex,
- 160 g/m²
- Colour: black







Capsule espresso coffee machine







£364.00 220.00

Furnishing set of 1 table and 3 vertically adjustable stools



£ 243.00 122.00

Office armchairs, for guests


- Back height: 60 cm
- Seat dimensions: 45 cm x 51 cm
- · Overall chair height: 110-120 cm
- Base: 28 cm (leg length) x 50-60 cm (height)
- Maximum weight capacity: 120 kg





£37.00 £ 18.00

Work gloves, with stretch-elastic cuffs. reinforced thumbs and index fingers, made from touchscreen capable synthetic leather







Work overalls with a racing-inspired style, for workers searching for a perfect combination of style and convenience

CONVENIENCE

The 4-WAY STRETCH fabric provides unique comfort for every movement.

The accurate details as well as the colours and inspiration from the racing world result in a captivating, trendy garment.

undundand	S	M	L	XL	2XL	3XL
	095770 151	095770 152	095770 153	095770 154	095770 155	095770 156

NEW ADVENT CALENDAR 2025



CE



Advent calendar containing 28 tools









