

TECHNICAL DATA SHEET

GLOBAL LAYOUT INKS

A range of specialised paints designed for the marking out of metal surfaces in engineering workshops

Description

A fast drying solvent deposited paint that leaves a thin, dry film enables clear, sharply defined lines to be scribed on most surfaces without flaking. Available in Translucent Blue, Opaque White and Opaque Blue

Applications

Translucent Blue is usually used for marking bright or machined surfaces while the White and Opaque are used for making dark surfaces such as castings

Summary of Benefits

- ◆ EASY TO APPLY
- ◆ ALLOWS CLEAR, SHARP DEFINITIONS
- ◆ RESISTS WASH OFF, IE. WATER MIX CUTTING FLUIDS.
- ◆ WILL NOT CHIP OR FLAKE.

Product Data (Typical)

Appearance	-	Blue or White Liquid
Flash Point	-	<0°C
Storage Temperature	-	0 - 30°C
Shelf life	-	1 year from date of manufacture

GLOBAL LUBRICANTS LTD
SANDWELL BUSINESS DEVELOPMENT CENTRE
OLDBURY ROAD, SMETHWICK
WESTMIDLANDS, B66 1NN, ENGLAND
Tel/ ++ 44 (0) 121 544 3638 Fax ++ 44 (0) 121 544 6505 email:sales@globallubricants.co.uk
web www.globallubricants.net

TECHNICAL DATA SHEET

Directions for use


Shake well before use, apply by soft brush, or lint free cloth, and allow film to dry for a minimum of 5 minutes before use.
The dried ink can be easily removed with Global Connect 2 solvent.

Precautions

Not to be taken internally
Keep out of reach of children
Keep away from direct heat
Do not store in direct sunlight or heat
Do not spray onto a naked flame or incandescent material

Health and Safety

For full Health and Safety data please refer to our specific MSDS Sheet which is available upon request.

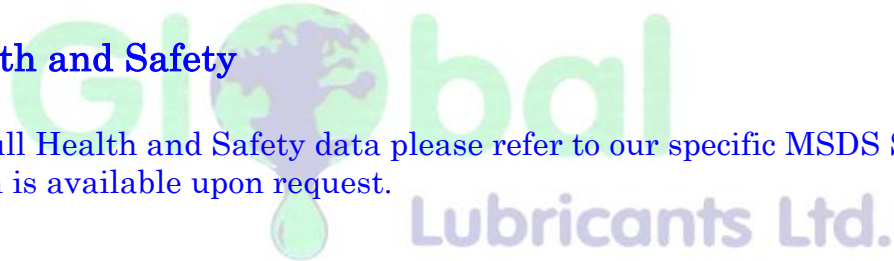

GLOBAL LUBRICANTS LTD
SANDWELL BUSINESS DEVELOPMENT CENTRE
OLDBURY ROAD, SMETHWICK
WESTMIDLANDS, B66 1NN, ENGLAND
Tel/ ++ 44 (0) 121 544 3638 Fax ++ 44 (0) 121 544 6505 email:sales@globallubricants.co.uk
web www.globallubricants.net